

- Thank you for purchasing the color vision sensor series Color Area Sensor (CVS1R).
- Before operating the product, read this manual thoroughly.
- Keep this manual handy for the future reference.
- This product cannot be used as safety device for human body protection.
- The warranty period of the product is one year from purchase. However, any malfunction due to natural disaster, improper conversion or maintenance shall be excluded from the warranty scope.

1 Before Operation

What is Color Area Sensor?

The Color Area Sensor detects the pixels that contain the same color information as the pre-set color, and measures their number (area). It outputs signal when the number of pixel falls within the specified range. The sensor is suitable for various types of detecting application such as with/without printing detection, mark detection, foreign object detection, and the detection of delicate color difference that is not possible with the color sensor.

Setup Procedure

You can proceed with the CVS1 setup in the following order.

- 1) **Optimum initialization for applications (Section 3)**
Select the optimum INITIAL setting for your application.
 - 2) **Teaching (Section 4)**
Register the detection color. You can reduce the capture area to eliminate undesired objects.
 - 3) **Setting customization (Section 5)**
Select settings such as color margin percentage and input/output signals.
- Learn the basic operations in Section 2, and start the setup in the order of 1 to 3 above.

2 Descriptions of LCD display

- 1) **Captured image**
The image captured by the camera is displayed.
- 2) **Mode display**
"RUN" mode is selected in the main menu.
- 3) **Screen display mode**
Indicates the current screen mode. (see right)
- 4) **Bank number**
Indicates the selected bank number (0 to 15).
- 5) **Detection color**
Displays the colors to be detected. Left: Darkest color, Middle: Middle tone, Right: Brightest color.
- 6) **Color area lower limit**
Indicates the lower limit of the detection color area.
- 7) **Color area**
Indicates the current area of the detection color.
Orange: Within the specified range
Green: Out of the specified range
- 8) **Color area upper limit**
Indicates the upper limit of the detection color area.
- 9) **Output status**
●: Output ON ×: Output OFF


In the parameter reference screen and the parameter selection screen, items No. 2, 6 and 8 above are respectively replaced with:
10) Parameter 11) Parameter value
12) Response time (unit: 0.1ms)

10) Parameter 11) Parameter value
12) Response time (unit: 0.1ms)

Main menu

- TEACH (3 sec. or more) → Teaching (See Section 4)
- SET → Parameter reference screen (See right)
- SET → Parameter reference 2nd screen (See right)
- DOWN/UP (3 sec. or more) → Lock all (Locks all the setting values.)
- UP/DOWN → Holding captured image/ waiting the output change (Holds the image captured at the moment the output changes.)
- UP/DOWN → Displays "CATCH" when the output changes.

External Dimensions

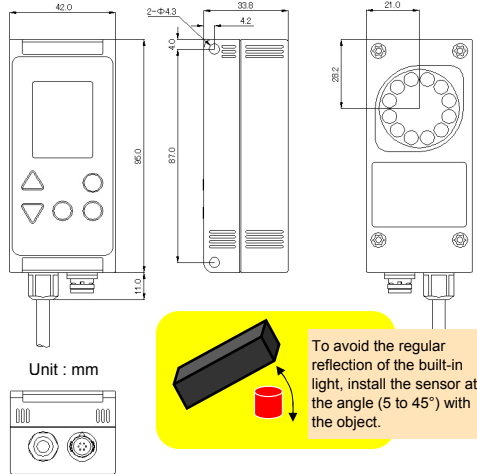

Connection of Power Supply and Input/Output Cable

The line colors and signal allocations of power supply and input output cable are as follows.

No.	Color	Signal
1	Brown	12-24V DC
2	Blue	0V
3	Orange/Black	Bank selection 0 input
4	Yellow/Black	Bank selection 1 input
5	Pink	Bank selection 2/Teaching input
6	Purple	Bank selection 3/Synchronous input
7	Black	Output
8	Red/Black	Lower limit out / Auxin

3 Optimum Initialization for the application

Select the INITIAL setting to initialize the parameter settings using the optimum values for your application.

Application	With/without print		Print on lustered/transparent material	Delicate color difference	With/without luster
	Expiry date 2004.8.25	2004.8.25			
INITIAL setting	1	2	3	4	
COLORFIL	1	1	0	0	
KIL BLK	27	27	27	20	
LIGHT	3	2+	3	3	
RESOLUT	0	0	0	1	
TEACHMD	1	1	0	2	
Resolution	200x120	200x120	200x240	200x240	
Teaching window	Normal	Normal	Small	Small	

Application	White/Black (on white)	White/Black (on black)	Difference between dark colors	With/without print (on unstable background)	
INITIAL setting	5	6	7	8	
COLORFIL	1	0	0	0	
KIL BLK	27	15	30	15	
LIGHT	3	3	3	3	
RESOLUT	1	1	0	0	
TEACHMD	0	0	0	1	
Resolution	200x120	200x120	200x240	200x120	
Teaching window	Normal	Normal	Small	Normal	

*All other settings are initialized together.
† Enables stable detection of printing by using diffused lighting or back lighting to eliminate the influence of luster.

Changing the Screen Display Mode

- F-display**
Displays the image after the dark correction process.
- 2-display**
Displays the colors other than the detection color in black (or white). Select this mode to check the stable detection of the registered color.
- D-display**
Displays the image before the dark correction process.

*Changing the screen display mode does not influence the judgment result. The entire procedure of color detection and registration is completed in F-display.



Parameter Reference/Selection Screen

Parameter reference screen ↔ **Parameter selection screen**

- UP: Previous setting item
- DOWN: Next setting item
- UP: Set value +1
- DOWN: Set value -1
- SET: Cancels the selected values and returns to the parameter reference screen.
- SET: Saves the selected values and returns to the parameter reference screen.
- SET: Returns to the main menu.
- SET: Lock status
- UP/DOWN (3 sec. or more): Locks the selected values. The locked values are displayed in blue and cannot be changed. Press again to cancel the lock.

Adjusts optimum shutter time (setting value of BRIGHT) in teaching process. If you want to fix shutter time, please set TEACHMD to 2 (or 3) and adjust BRIGHT before performing teaching.

Parts Identification

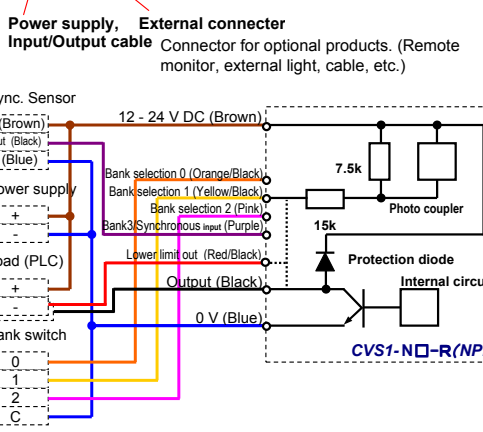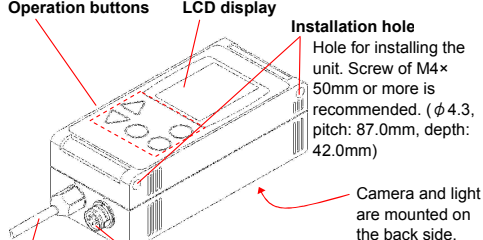

5 Settings

- Select the settings before teaching.
 - Adjust the settings after teaching to optimize the detection performance.
 - Parameter reference 2nd screen
- *The functions in purple display contain the setting values for each bank.

Function	Setting range (initial value)	Description
LCD display		
LCD up/down reverse LCD VIEW	0 to 3 (0)	0: Normal display 1: Reverses the LCD display vertically. Select 1 when installing the unit upside-down. 2, 3: Functions as 0 and 1 on the condition that the remote monitor (CVS-M1) is connected. LCD display turns off if no button operation is detected for a minute. NTSC composite video signal is output from the external connection port.
Light ON/OFF LIGHT	0 to 3 (1)	Controls the internal and external lighting. 0: Internal light=OFF, External light=ON 1: Internal light=ON, External light=ON 2, 3: Functions as 0 and 1. When "SYNCHRO=1,3" is selected, the light turns ON only during image capture ⁴ .
Maximum display area MAXAREA	0 to 9999 (9999)	Selects the maximum area. Use the function to directly read the displayed value in AREA LO or AREA HI as the area.
OFF delay time OFFDELAY	0 to 5000 (0)	Delays turning OFF of the output. Allows it to turn off when the judgment result remains in OFF condition continuously for over the selected delay time (unit: ms).
ON delay time ONDELAY	0 to 5000 (0)	Delays turning ON of the output. Allows it to turn on when the judgment result remains in ON condition continuously for over the selected delay time (unit: ms).
One-shot ONESHOT	0, 1 (0)	Select "1" to keep the output ON for the off-delay time after the output turns on.
Outside area range OUTSIDE	0 to 3 (0)	0: Output ON within the specified area range. 1: Output ON outside the specified area range. ⁵ 2, 3: Functions as 0 and 1. "Bank selection 1 input" performs detection when the area exceeds the lower limit.
Resolution RESOLUT	0, 1 (1)	Select the number of pixels taken out from the image sensor. 0: High resolution (240 x 200) 1: Suitable to detect delicate color difference and thin characters. 1: High speed (240 x 100) Suitable to shorten the response time retaining the current capture area.
Synchronization input delay time SYNCDLY	0 to 255 (0)	Selects the delay time of synchronization input. The synchronization signal input (bank selection 3 input) delays for the period of the setting value x 64µs. Suitable for fine adjustment of image capture timing.
Synchronization input SYNCHRO	0 to 4 (4)	Selects the synchronization input setting. When set to 0 to 3, "bank selection 3 input" is assigned to the synchronization input. The capturing conditions are as follows. ⁶ 0: While the synchronization input is Off 1: When the synchronization input is switched from On to Off 2: While the synchronization input is On 3: When the synchronization input is switched from Off to On 4: Captures images independently.
Teaching enable TEACHEN	0 to 3 (0)	0: Enables changing the teaching window and its position, and the capture area. 1: Prohibits changing the capture area. 2: Prohibits changing the teaching window and the capture area. 3: Prohibits entering the teaching mode.
Teaching mode TEACHMD	0 to 3 (0)	0: Normal teaching. Determines the darkest and brightest colors in the teaching window, and selects the detection color within the range between them. 1: Stain and character detection teaching. Selects a dark color in the teaching window as the detection color. 2, 3: Functions as 0 and 1. Performs teaching without changing the brightness (BRIGHT).
Teaching color margin TEACH%	0 to 30 (15)	Selects the color detection margin in teaching. (Refer to the details to COLOR%).
Temperature compensation level TEMPCMP	0 to 255 (30)	Adjusts the setting against the deviation in color detection due to variable temperature. (Available only when both COLORFIL=0-2 and RESOLUT=1 are selected.) Perform teaching at low temperature and adjust the setting at high temperature to obtain the optimum value.
Language selection LANG	0/1 (0)	Selects a display language. 0: English 1: Japanese
Lighting brightness LED BRI	0 to 255 (170)	Adjusts the brightness of the internal lighting. 0 is the switching-off state. 255 is the brightest state.
Lighting brightness difference LED PAN	0 to 100 (50)	Changes the ratio of the brightness of the upper lighting to the lower lighting of the internal lighting. 0: Only the upper lighting is turned on. 50: The upper and lower lightings are turned on at the same brightness. 100: Only the lower lighting is turned on.
Communication speed BAUD	0 to 3 (3)	Selects the communication speed. 0: 9600bps/1: 14400bps/2: 57600bps/3: 115200bps
Bank Copy BKCOPY	0 to 15 (0)	Select a destination bank. Copy the current bank to the destination bank.
Expansion display EXV	0 to 3 (0)	Displays the internal state only on the body LCD. 0: Not displayed/1: Blue color display/2: Green color display/3: Red color display
Img Select IMG SEL	0 to 7 (0)	Select the input image. 0: Original/1: Exponential/2: Red color/3: Green 4: Blue color/5: Low intensity/6: Mid intensity/7: Special

4 Descriptions of Teaching Menu

Teaching Menu Screen


- Teaching window**
Detects the darkest, middle tone, and brightest colors within the window.
- For delicate color detection: Select smaller area for window view.
- For stable detection in broader color range: Select larger area for window view.
- For character detection (TEACHMD=1,3): Select larger area for window view to include both the characters and background colors.
- Teaching Point 1**
Automatically switches between F-display and 2-display.
- Teaching Point 2**
In 2-display, ensure that only the color you register is displayed.

UP/Down: Performs the displayed option of the parameter (changing window position, window size and captured area).
SET: Saves the teaching results and exits the menu.
TEACH: Selects the window operating function.

For details of 1-point teaching, 2-point teaching, and Upper/Lower limit teaching, refer to AREA LO, AREA HI.

Specifications

Model	CVS1	-N10-R -P10-R	-N20-R -P20-R	-N21-R -P21-R	-N40-R -P40-R
Detection angle	10°	20°	40°	40°	40°
Capture range	210 to 270 mm	90 to 150 mm	31 to 39 mm	50 to 100 mm	50 to 100 mm
Capture area (±10%)	40×50 to 55×65 mm	40×50 to 65×75 mm	17×20 mm	50×65 to 100×115 mm	50×65 to 100×115 mm
Light source	White LED, 12 pcs				
Supply Voltage	12 - 24 V DC±10%				
Power consumption	Max. 140 mA/24V DC				
Resolution	8×16 to 208×236				
Lamp duration	Approx. 50000 hrs (In normal temperature and humidity. Brightness level down by 1/2 of the initial level)				
Response time	11 ms (Factory setting), 0.6 ms (Min.), 22 ms (Max.)				
Output signal	NPN/PNP open collector output 2 points Max. 100 mA Residual voltage 1.0 V or less				
Input	Bank selection/Synchronous/External teaching input 4points 0 °C to 40 °C				
Operating temperature	0 °C to 40 °C				
Ambient humidity	35 % to 85 %/RH				
Storage temperature/humidity	-20 °C to 70 °C, 35 % to 95 %/RH				
Vibration/shock resistance	10 to 55 Hz Amplitude 1.5 mm, 500ms ² (10 times)				
Material	ABS / Acryl / Polycarbonate				
Protection structure	IP67				
Weight	Approx. 200 g				

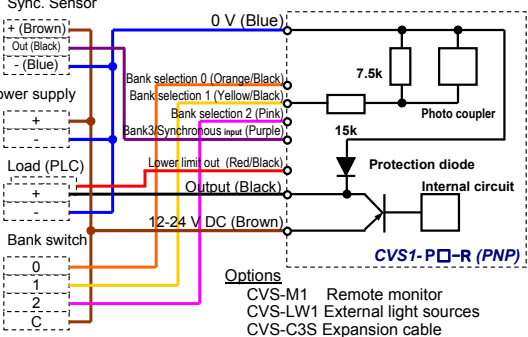

¹ The maximum value is adjustable using the MAXAREA setting.
² The bank selection input specifies the bank number using binary digit. (Ex. For Bank 10, set the bank selection 1 and 3 to ON.)
³ Time setting longer than the response time is ignored.
⁴ Immediately after a button operation, the light does not turn off even during the image capture.
⁵ When ON delay time, OFF delay time, and One-shot are activated together, Area hysteresis is deactivated (HYSTRSY=0).
⁶ When "SYNCHRO=1,3" is selected, the color area judgment is properly proceeded while the LCD does not display the image captured immediately after any button operation. An array of the right end of the image may appear at left end of the display, but does not interfere with the performance.

Teaching Procedure

- Window vertical magnification/reduction
UP: Magnifies the window vertically.
DOWN: Reduces the window vertically.
- Window Up/Down
UP: Moves up the window.
DOWN: Moves down the window.
- Window horizontal magnification/reduction
UP: Magnifies the window horizontally.
DOWN: Reduces the window horizontally.
- Window Right/Left
UP: Moves the window to right.
DOWN: Moves the window to left.
- Capture area size
UP: Sets the window view area as the capture area (Zoom-in).
DOWN: Resets the capture area to the full size (Zoom-out).

Full size | Magnified

(1-point teaching) Start Color is determined. End
Bank selection 2 input ON OFF 3 sec. or more

(2-point teaching) Start Point 1 color is determined. Point 2 color is determined. End
Bank selection 2 input ON OFF 3 sec. or more 3 sec. or more

Timing chart of external teaching (Select "BANK=0 to 16.")

OPTEX FA CO., LTD.
Headquarters: 600-8815 Kyoto, Shimogyo-ku, Awatacho 93, Kyoto
research park Bldg. JAPAN
http://www.optex-fa.com

2nd printed on 19th March 2010