

## S51-MA/MR SERIES INSTRUCTION MANUAL

### CONTROLS

#### OUTPUT LED (S51...A00/B01/C01/C10/C20/F00)

The yellow LED ON indicates that the NO output status is closed.

#### POWER ON LED (S51...G00)

The green LED indicates that the sensor is operating.

#### TRIMMER (S51...B01/C01)

The trimmer can be used to adjust sensitivity; the operating distance increases turning the trimmer clockwise.

#### WARNING: The trimmer rotation is limited to 270°.

Do not apply excessive torque beyond the maximum and minimum positions (max 40 Nmm).

### INSTALLATION

The sensor can be fixed by means of the M18x1 threaded body through a  $\varnothing$  18 mm hole, using the two CH.24 nuts enclosed (22 Nm maximum tightening torque).

Various orientable fixing brackets are available to ease the sensor positioning (please refer to the accessories listed in the general catalogue).

The operating distance is measured from the front surface of the sensor lens.

C. models: To improve the detection, the object has to be moved closer or further away from the front surface of the sensor lens.


In case of lateral translation, the object must move as indicated in the figure.




### CONNECTIONS

The connections are compliant to the EN 60947-5-2 standard.

#### S51...A00/B01/C01/C10/C20/F00



#### S51...G00




\* in case of white wire or pin 2 not connected the sensor works in LIGHT mode for proximity models (C01/C10/C20) and in DARK mode for retroreflex (A00/B01) and receiver (F00).

#### M12 CONNECTOR




### DIMENSIONS

#### AXIAL VERSION

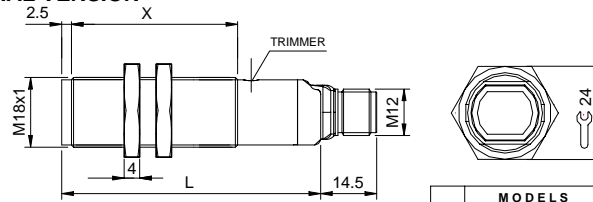

MODELS		
	B01/C01/F00	A00/C10/G00
L	67	57
X	43	38


#### RADIAL VERSION

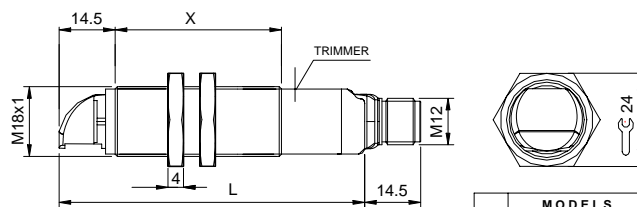

MODELS		
	B01/C01/F00	A00/C10/G00
L	79	69
X	43	38

mm

#### CABLE VERSION



### SETTING

#### Setting of S51...A00/B01

Position the sensor and reflector on opposite sides. Moving the sensor both vertically and horizontally, determine the power on and off points of the yellow LED (OUT) and then mount the sensor in the middle of the points defined.

**B01 Model:** Turn the sensitivity trimmer to the maximum position.

If necessary reduce sensitivity in order to detect very small targets. In order to improve alignment, repeat the procedure detailed above whilst progressively reducing the sensitivity.

#### Setting of S51...F00/G00

Position the sensors on opposite sides.

Move the sensor both vertically and horizontally, determine the power on and off points of the yellow LED (OUT) and then mount the sensor in the middle of the defined points.

#### Setting of S51...C01

Turn the sensitivity trimmer to minimum: the yellow LED is OFF.

Position the target to detect in front of the sensor.

Turn the sensitivity trimmer clockwise until the yellow LED turns ON (Target detected state, pos.A).

Remove the target, the yellow LED turns OFF.

Turn the sensitivity trimmer clockwise until the yellow LED turns ON (Background detected state, pos.B).

The trimmer reaches the maximum level if the background is not detected.

Turn the trimmer to the intermediate C position, between the two A and B positions.



#### Setting of S51...C10/C20

The operating distance range of these sensors is factory preset: please consider this feature when positioning.

### TEST FUNCTION (S51...G00)

The TEST+ and TEST- inputs can be used to inhibit the emitter and verify that the system is correctly operating.

The receiver output should switch when the test is activated while the beam is uninterrupted. The inputs activating voltage range is 10 ... 30 Vdc, whilst respecting the polarity.

The emission is switched off connecting TEST+ to Vdc and TEST- to 0V.

EX-II-3-D T6	
Temperature class:	T6 (<85°C)
Max. Power consumption:	900 mW at 30 Vdc
Max. Internal capacitance:	170 nF
Internal inductance:	negligible

#### DECLARATION OF CONFORMITY

We DATALOGIC AUTOMATION declare under our sole responsibility that these products are conform to the 2004/108/CE and successive amendments.



#### WARRANTY

DATALOGIC AUTOMATION warrants its products to be free from defects.

DATALOGIC AUTOMATION will repair or replace, free of charge, any product found to be defective during the warranty period of 36 months from the manufacturing date.

This warranty does not cover damage or liability deriving from the improper application of DATALOGIC AUTOMATION products.

#### DATALOGIC AUTOMATION

Via Lavino 265 - 40050 Monte S. Pietro - Bologna - Italy

Tel: +39 051 6765611 - Fax: +39 051 6759324

www.automation.datalogic.com e-mail: info.automation.it@datalogic.com

DATALOGIC AUTOMATION cares for the environment: 100% recycled paper. DATALOGIC AUTOMATION reserves the right to make modifications and improvements without prior notification.

Datalogic and the Datalogic logo are registered trademarks of Datalogic S.p.A. in many countries, including the U.S.A. and the E.U.

### TECHNICAL DATA

	S51-MA AXIAL VERSION	S51-MR RADIAL VERSION
Power supply:	10 ... 30 Vdc (limit values)	
Ripple:	2 Vpp max.	
Current consumption (output current excluded):	30 mA max.	
Outputs:	N.O.; PNP or NPN (short circuit protection)	
Output current:	100 mA max.	
Output saturation voltage:	2 V max.	
Response time:	1 ms (4 ms mod.F00)	
Switching frequency:	500 Hz (120 Hz mod.F00)	
Indicators:	OUTPUT LED (YELLOW) mod.G00 excluded POWER ON LED (GREEN) (mod.G00)	
Setting:	sensitivity trimmer (mod.B01/C01)	
Operating temperature:	-25 ... 55 °C	
Storage temperature:	-25 ... 70 °C	
Insulating strength:	500 Vac 1 min., between electronics and housing	
Insulating resistance:	>20 MΩ 500 Vdc, between electronics and housing	
Operating distance (typical values):	A00: 0.1...3.5 m on R2 B01: 0.1...2.5 m on R2 C01: 1...40 cm C10: 0...10 cm / C20: 0.2...10 cm F00/G00: 0...18 m	A00: 0.1...2.5 m on R2 B01: 0.1...2.0 m on R2 C01: 1...30 cm C10: 0...8 cm F00/G00: 0...15 m
Emission type:	RED (660 nm) (mod.B01) / INFRARED (880 nm) (mod.A00/C01/C10/C20/G00)	
Ambient light rejection:	according EN 60947-5-2	
Vibrations:	0.5 mm amplitude, 10 ... 55 Hz frequency, for every axis (EN60068-2-6)	
Shock resistance:	11 ms (30 G) 6 shock for every axis (EN60068-2-27)	
LIGHT/DARK selection:	white wire or pin 2 connected to +10...30V LIGHT mode; to 0V DARK mode white wire or pin 2 not connected LIGHT mode (mod.C01/C10/C20); DARK mode (mod.A00/B01/F00)	
Housing material:	Nickel-plated brass	
Lens material:	PMMA	
Mechanical protection:	IP67 Type 1 enclosure	
Connections:	2 m cable $\varnothing$ 4 mm / M12 - 4 pole connector	
Weight:	110 g. max. cable vers. / 60 g. max. connector vers.	