


Over Drive™ Features

- IP68 Standards - Stainless Steel 316 Housing
- Meets FDA Compliance
- Highest Output LED Lights available in the Vision Industry
- SafeStrobe Technology ensures protected operation of LED's
- Driver built in – No External wiring to a driver
- 4 to 10 times brighter than standard high current LED Lights
- Industry Standard M12 Quick Disconnect
- PNP and NPN Strobe input
- Option of connecting lights together >> Connect-a-Light®



Electrical Input	Voltage: 24 VDC +/- 5%	
Duty Cycle	Maximum 10%	
Strobe Input	PNP ► +4VDC or greater to activate.	NPN ► GND (<1VDC) to activate
Current	Max 6 A	Max Average 600mA
Strobe / Pulse	Maximum Single Pulse = 125ms	
RED Indicator LED	Duty Cycle	ON = LED Rest (LED inactive) OFF = LED/Light Ready
GREEN Indicator LED	ON = Power	
Power	Smart Vision Lights recommends 2 amps of supply current per light.	



1 = 24VDC
2 = NPN STROBE
3 = GND
4 = PNP STROBE
5 = No Connection

Standard M12 mating cable color code:

BROWN
WHITE
BLUE
BLACK
*GRAY (GREEN/YELLOW)



Important

Please note that the power requirements are 2 amps at 24VDC. Failure to supply light with 2 amps will result in non-repeatable lighting. Contact Smart Vision Lights for more information.

ODWL300 – XXX – —» Part Number Key


Product Family:
Linear Light
ODL300

Color:
625 – Red
White – WHI
470 – Blue
505 – Cyan
530 – Green
IR 850nm
IR 940nm
UV 395nm
UV 365nm

Lenses:
W - Wide
L - Line

* Lights come standard with Narrow lenses
CE and RoHS Compliant

Duty Cycle on Performance of Light

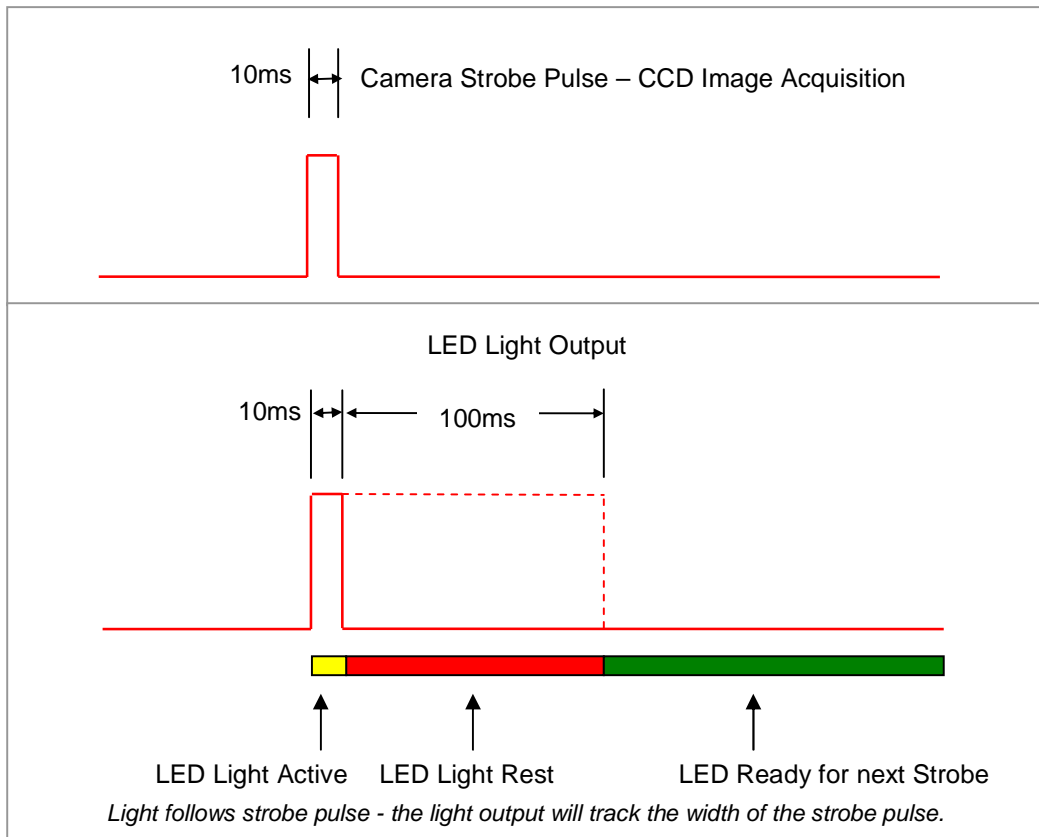

Duty Cycle (D) is defined as the ratio between Strobe Time and Rest Time

Maximum Duty Cycle for ODL Lights is 10% = .1

Calculating Rest Time - R_T

$$R_T = \frac{S_T}{D}$$

where

S_T is the Strobe Time

R_T is the Rest Time

D is Duty Cycle

Example: Camera exposure of 10ms where Strobe Time is 10ms

$$R_T = \frac{10\text{ms}}{.1} = 100\text{ms}$$

Rest Time is 100ms for 10ms Strobe Time