


## Linear-Transducer LA66K - CAM

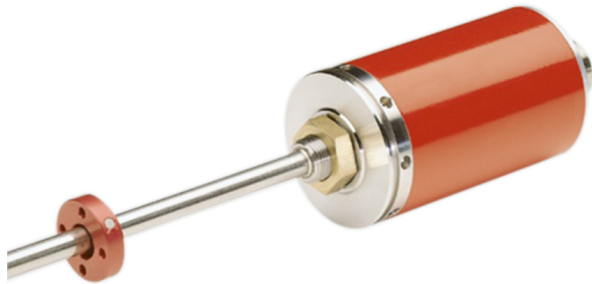

Ref.: K-LA66-NSW-1

18.11.2013

0102010060

### Advantages

- \_ Flexible programming
- \_ Measures linear movements
- \_ Perfect fit for cylinders
- \_ Pressure proof tube housing
- \_ Wear-free detection

### General Data

Supply	
- Supply voltage	24 VDC, -20...+10 %
Current consumption no load	<= 250 mA
Measuring principle	magnetostrictive
Measuring length, standard	150...3000 mm, in steps
Resolution	0.01 mm
Linearity deviation	< 0.05 %
Reproducibility	0.01 mm
Hysteresis	0.1 mm
Temperature coefficient	< 8 $\mu\text{m}/^\circ\text{C}$ <= 500 mm < 15 ppm/ $^\circ\text{C}$ > 500 mm
Straight line velocity	no restrictions
Mounting position	no restrictions
Material - Measuring body	Cr/Ni - alloy
Rod end mounting	Option
Magnet	T3-U64, Option T4-M33, Standard
Parallel - Interface	
- Parallel Output	Cam data
- Push-Pull	11...27 VDC
- Open Collector/Emitter	<= 35 VDC, Pull-Up/Pull-Down

Subject to change.

TR-Electronic GmbH  
 Eglisshalde 6  
 78647 Trossingen  
 Tel. +49 (0) 7425 228-0  
 info@tr-electronic.de  
[www.tr-electronic.de](http://www.tr-electronic.de)

## Linear-Transducer LA66K - CAM

Ref.: K-LA66-NSW-1

18.11.2013

0102010060

### General Data continuation

- Output current	<= 100 mA
- Cam tracks	8
- Cam/Track	1
- Dynamic cams	yes
Parameter/Function, changeable	Resolution
	Output code
Type of parametrization	programmable
Prgramming - Tool	TR-Tool: PT-100-N
Cycle time, internal	see dimensional drawing
External inputs	
- F/R	Count direction
- Preset	electronic adjustment
- Logic level	"0" < +2V, "1" = Supply

### Environmental conditions

Vibration	
- Specific value	<= 100 m/s <sup>2</sup>
- Sine	50...2000 Hz
Shock	
- Specific value	<= 1000 m/s <sup>2</sup>
- Half sine	11 ms
Immunity to disturbance	DIN EN 61000-6-2
Transient emissions	DIN EN 61000-6-3
Working temperature	
- Standard	0...+70 °C
- Optional	-20...+70 °C;
Storage temperature, dry	-30...+80 °C
Relative humidity	98 %, non condensing
Protection class	
- Standard	IP65
Stray magnetic field	< 3 mT
Measuring reference	Measuring plane
Pressure resistance	
- Optional	600 bar, static

Subject to change.


# Linear-Transducer LA66K - CAM

Ref.: K-LA66-NSW-1

18.11.2013

0102010060

## Dimensional drawing

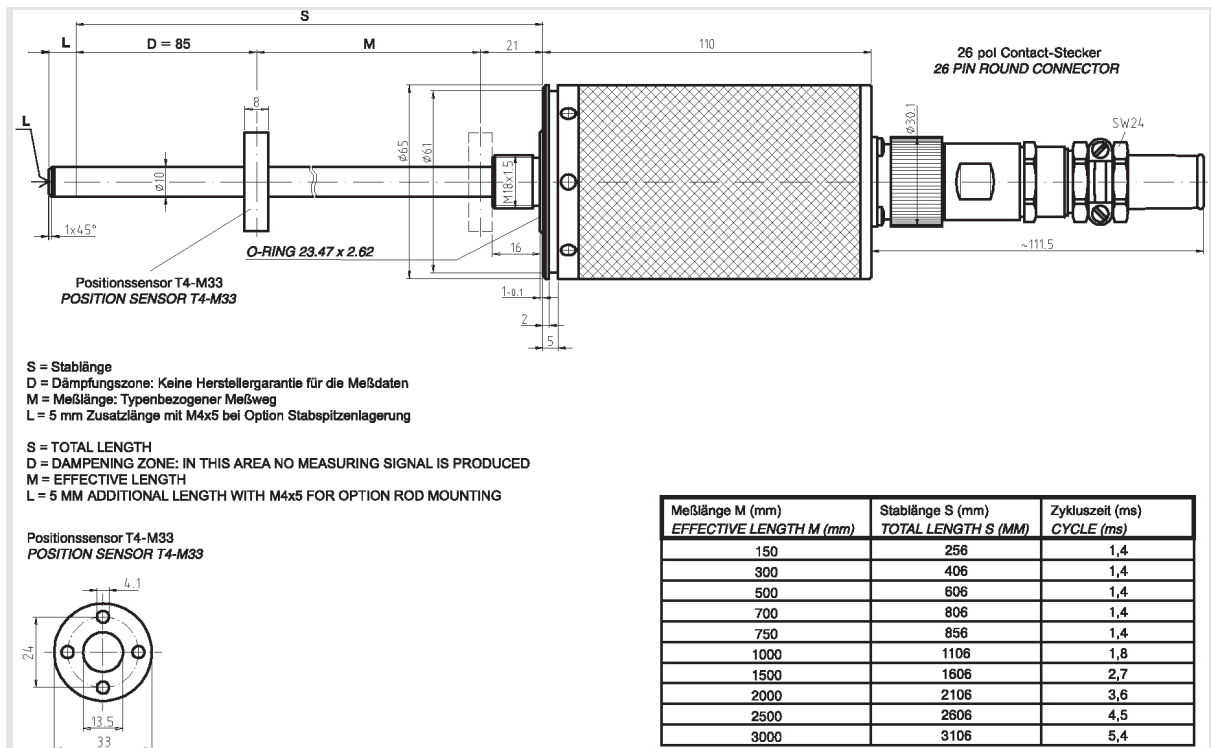

Subject to change.