


LN-200SW-HK-STK

Model	LN-200SW-HK-STK
Voltage	24V DC
Power consumption	22W
Mass	750g
Connector type	3P (1: + , 2: NC , 3: -)

Third Angle Projection Units: mm

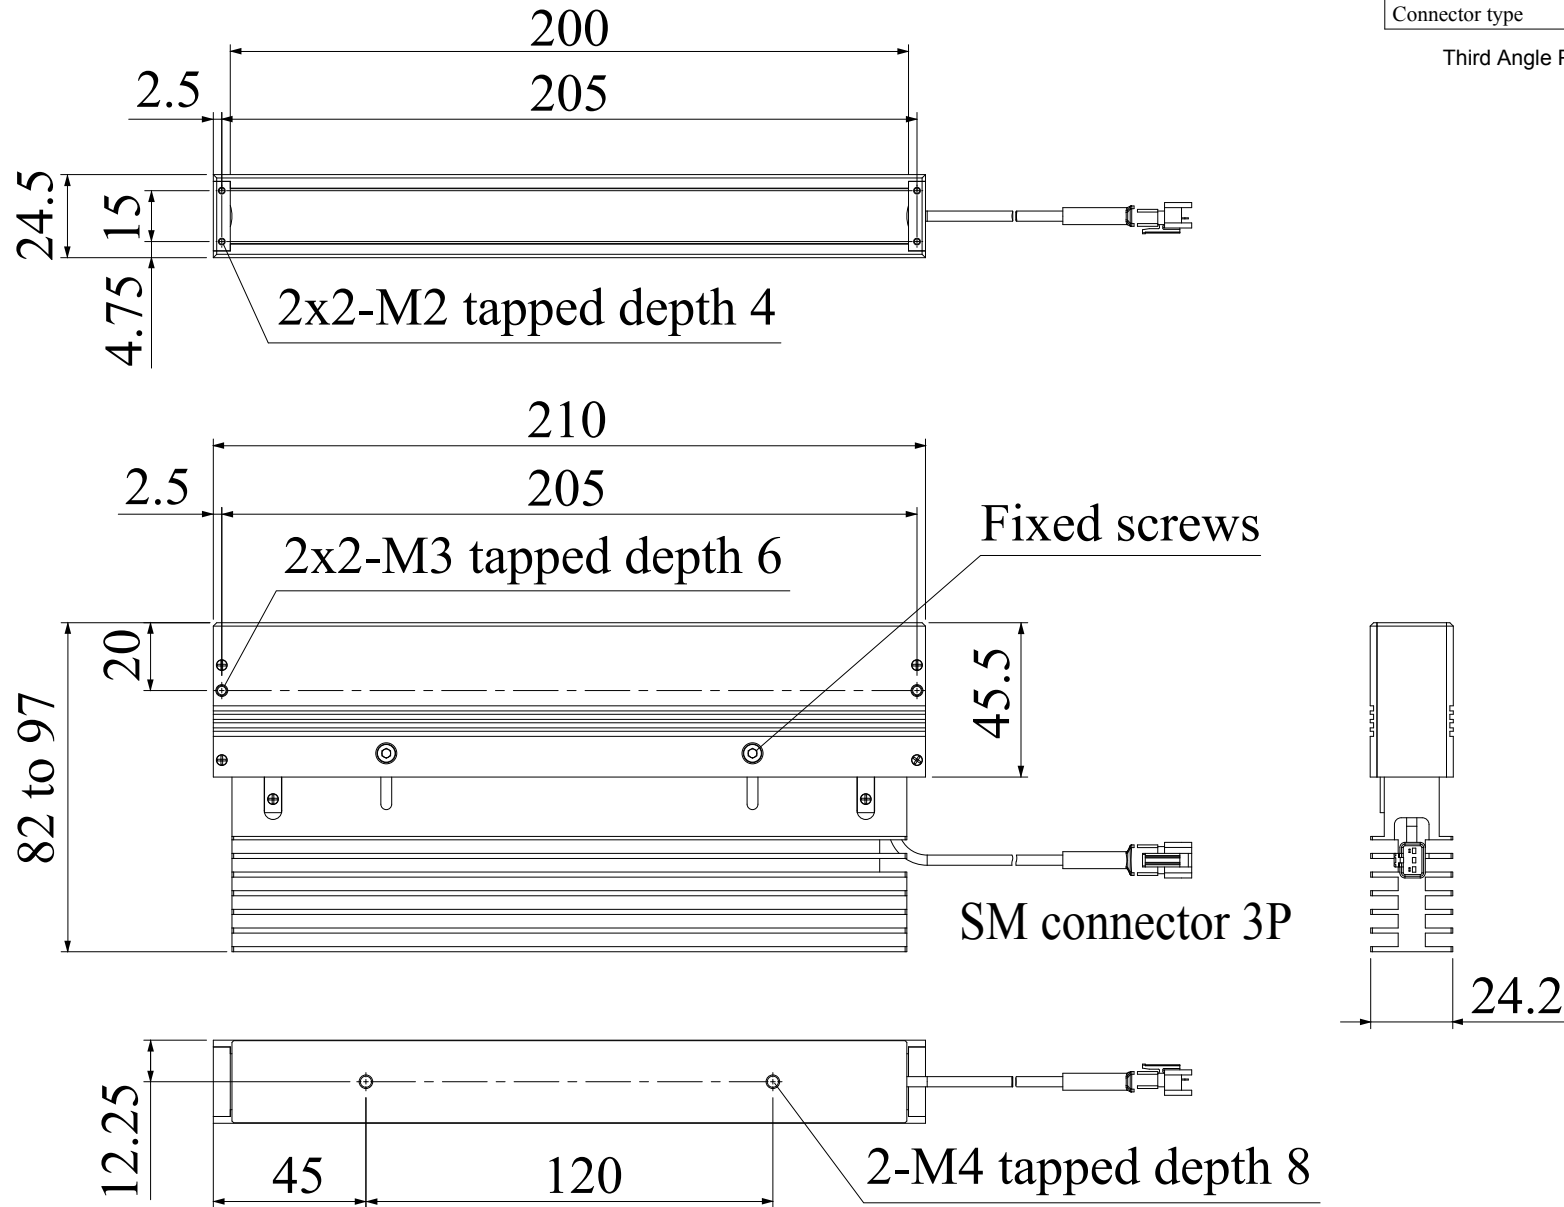

Halogen Replacement

Replaces 100-150 W halogen line lights



LN Series - Highly Intense Convergent Beam Line Light

***1**
Intensity equivalent to that of a 100-150 W halogen light

Intensity has been greatly increased from conventional lights by using highly intense white LEDs.

No necessity for a light guide

Elimination of light guide requirement provides for easy handling.

***2**
Energy-saving and long lifetime

Low power consumption of only 22 W gives a 40 times longer lifetime than a halogen source.




*Focused line width can be changed by adjusting the inside light source

Specifications

Model Name	LN-60SW-HK-STK	LN-200SW-HK-STK
Input Voltage	DC24V	DC24V
Power Consumption	6.1W max.	22W max.
LED Color	White	
Cable Length	0.3m	
Connector	2-prong connector, SMR-03V-B / Manufacturer: JST	
Pin Assignments	1: Anode (+) brown 2: NC 3: Cathode (-) blue	
Operating Conditions	Temp. 0 - 40°C (Light intensity may vary with changes in ambient temperature) Temp. 0 - 40°C, Humidity 20 - 85% (non-condensing) (Should not be frozen or exposed to condensation or sudden changes in temperature)	
Storage Conditions	Temp. -20 - 60°C, Humidity 20 - 85% (non-condensing)	

Dimensional Diagrams (mm)

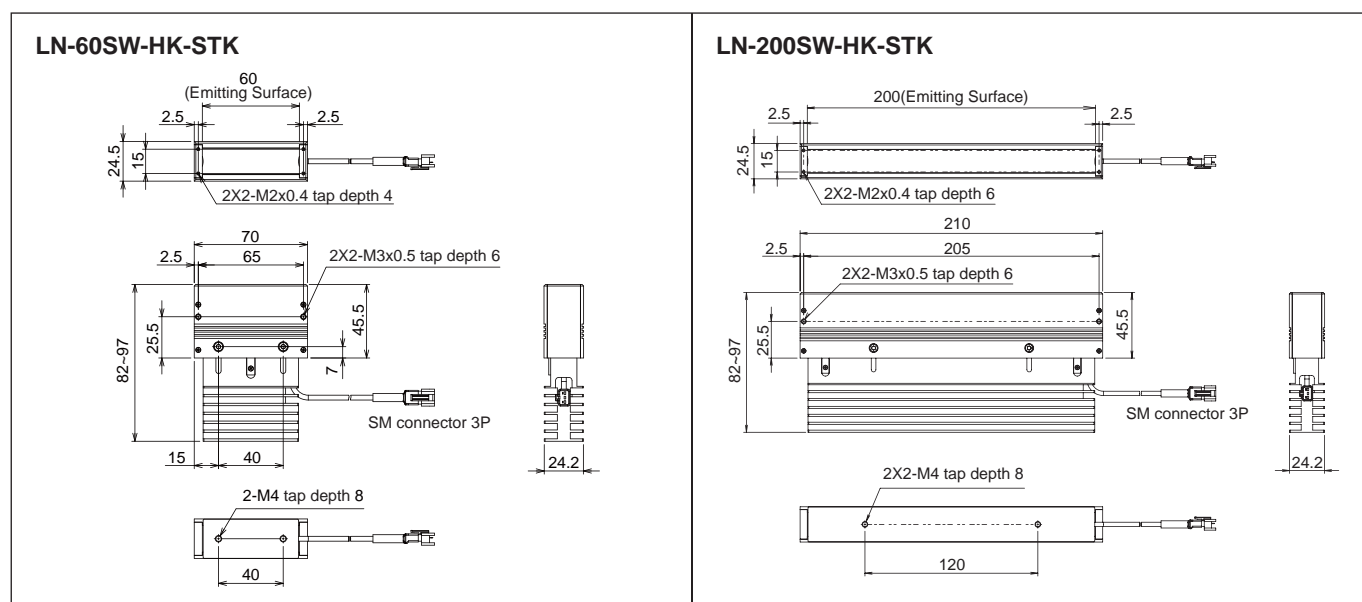

Caution

– Specifications or design are subject to change without notice.

CCS Inc. <http://www.ccs-grp.com>

■ Headquarters

Shimodachiuri-agaru, Karasuma-dori, Kamigyo-ku, Kyoto 602-8011 Japan
Phone: +81-75-415-8284 / Fax: +81-75-415-8278
E-mail: intlsales@ccs-inc.co.jp