

SENSORS & SAFETY

Datalogic has more than 40 years of experience in the sensors and safety sector, developing their first product, a **Photoelectric Sensor**, in 1972. Today, Datalogic is one of the largest manufacturers of sensor and safety products worldwide.

Datalogic is the market leader in Italy for photoelectric sensors and safety light curtains, ranking among the **top-10 manufacturers** in Europe by market share*

Datalogic's **Sensors and Safety** portfolio solves customer applications in **Factory Automation**, specializing in Processing and Packaging machinery, and Automated Material Handling Systems related to Manufacturing Industries such as Automotive, Electronics, Pharmaceutical, Food & Beverage, Paper and Printing, Wood-working, Ceramics, Glass, Textiles etc.


* (source: based on VDC 2010 - 2011)

APPLICATIONS	De-Palletizing	Storage & Retrieval
	Washing	Cartooning
	Filling	Wrapping
	Capping	Vertical Form Fill & Seal
	Labeling	Processing
	Case Packing	
	Stretch-wrapping	
	Palletizing	

Tubular, Miniature and Fiber Optic sensors for object detection


Inductive proximity sensors

Fork sensors for label detection

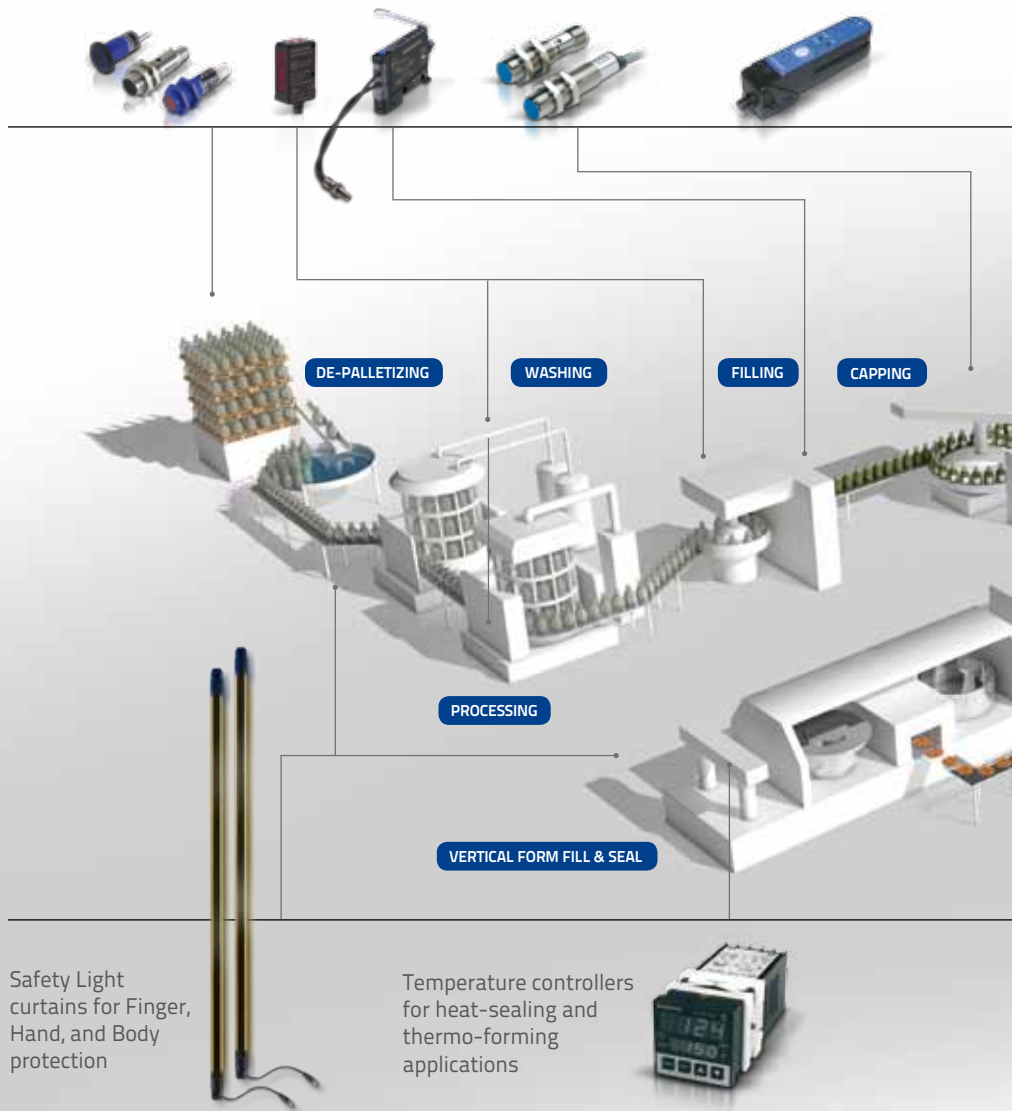

SENSOR PRODUCTS

SENSORS PRODUCT RANGE

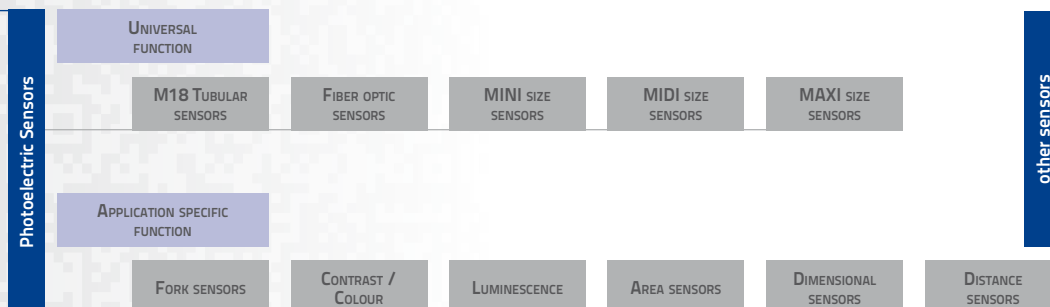

Inductive
Ultrasonic
Capacitive
Temperature

Contrast and Luminescence sensors

Area sensors

Maxi and compact sensors for object detection



LABELING


STRETCH-WRAPPING

PALLETIZING

STORAGE & RETRIEVAL

WRAPPING

CARTONING



Dimensional sensors for height/width measurement and object positioning



TOF distance sensors for measurement and object positioning



Safety Light curtains for body protection with Muting function

SAFETY PRODUCTS

SAFETY PRODUCT RANGE

Safety Light Curtains Type 2 and Type 4

HIGH / LOW RESOLUTION

FINGER PROTECTION

HAND PROTECTION

BODY PROTECTION

PRESENCE CONTROL

BASE / EXTENDED FUNCTIONALITIES

AUTO / MAN RESTART

EXT DEVICE MONITORING

MUTING

OVERRIDE

BLANKING

CASCADABLE

other safety products

- Controller
- Light beam
- Module
- Relay unit
- Accessories

Subminiature sensors



SM-ALL

The smallest photoelectric sensor with all universal optic functions
Detection of hard to reach objects or in reduced spaces

TECHNICAL DATA

- Fixed focus proximity 15, 20, 30, 50 cm
- Retroreflex 1.5 m and Polarised 1 m
- Through-beam 2 m
- NPN or PNP version with NO-NC outputs
- 4 wires connection with 2m Cable
- IP 67 Plastic subminiature case

APPLICATIONS

- Processing and Packaging machinery
- Electronics assembling
- Small appliance and vending machines

Miniature sensors



S3Z

High performance in standardized miniature housing
Replaces larger sensors and fits in limited space in smaller machinery

TECHNICAL DATA

- Diffuse proximity 15 or 70 cm
- Background suppression Red LED or Laser 50-300 mm
- Polarised RRX 4 m, Coaxial for Trasp. 2m, Laser 10 m
- Through-beam 15 m and Laser 30 m
- 3 wires connection with 2m Cable or M8 connector
- IP67 Plastic miniature case
- M3 threaded holes on the front side

APPLICATIONS

- Processing and Packaging machinery
- Electronics assembling
- Small machinery and access control

Miniature sensors



S100

Universal Miniature Photoelectric Sensor
Cost saving: best market price ever
Space saving: standard miniature dimension and universal mounting
Time saving: quick and easy mechanical and electrical installation

TECHNICAL DATA

- Through-beam 12m
- Retroreflective 8m
- Polarized retroreflective 2m and 5m
- Diffuse proximity 30 and 50cm
- Fixed Focus 70mm
- Background Suppression 100mm
- NPN or PNP output with L/D input
- 2m Cable or M8 connector version
- IP67 Plastic miniature case
- M3x4 slotted holes on the back side
- M3 threaded holes on the front side

APPLICATIONS

- Processing and Packaging machinery
- Conveyor lines, material handling
- Automated warehousing

Fork sensors



SR21/SR23

High-resolution, very fast response time
Execution of precise positioning, applying and printing of labels, even when integrated in fast machinery and process

TECHNICAL DATA

- Slot width 2mm or 5mm and depth 50 mm for normal label or booklet label detection
- Up to 20 μ s response time and 25 kHz switching frequency
- IR LED emission for label detection on translucent reel
- Red/Green LED emission for colour mark detection
- Auto-Set for teach-in or dynamic threshold setting
- NPN and PNP outputs with M8 4-poles connector
- Compact and robust metal case with IP65 protection

APPLICATIONS

- Packaging and labeling machinery
- Print and apply systems

Contrast sensors



TL46

High resolution, white or RGB emission, very fast response time
Performs precisely in packaging machinery and synchronization based mark detection, even when used in extremely fast processes

TECHNICAL DATA

- Operating distance 6-12 mm (80 mm with acc. lens)
- Bright light emission with Red, White, or RGB LED
- Mark/Bkgd automatic, manual and dynamic setting
- Trimmer or Teach-in setting with 4 digit display version
- Very fast switching frequency 15, 20 or 30 kHz
- Configurable NPN/PNP and 0-5V analogue output
- Standard metal case with IP67 protection

APPLICATIONS

- Packaging and labeling machinery
- Food & Bev., Cosmetic, Pharma industry
- Printing machinery

Luminescence sensors



LD46

UV high power emission LED with high sensitivity
Precise packaging machinery synchronization or material sorting and selection based on luminescent "invisible" mark detection

TECHNICAL DATA

- High power UV light emission at 375 nm wavelength
- Operating distance 10-20, 20-40, or 30-50 mm
- Teach-in setting and manual threshold adjustment
- 5 segments bar-graph for sensitivity level indication
- Fast response time 250 μ s and switching freq. 2 kHz
- NPN and PNP outputs and 0-5 V analogue output
- Standard metal case with IP67 protection

APPLICATIONS

- Packaging and labeling machinery
- Food, Cosmetic and Pharma industries
- Ceramic tiles selection and sorting
- Wood working

Compact sensors

S8



Extremely high performance
Solves difficult detection applications
(i.e. target objects that have been too small,
too fast, too clear, too shiny)

Compact sensors

S62



50x50 Standard universal sensor with
improved performance and pricing
Standardization of the same 50x50 mm
housing, mounting holes, installation, wiring,
for all optic functions

Maxi sensors

S300-PA/PR



Heavy duty, multi-voltage sensors with
terminal block and internal relay
Durability for integration in outdoor
applications and harsh environments

TECHNICAL DATA

- Background suppression 50-300 mm, Laser 20-200mm
- Background suppression for Transparent objects with reflective background
- Polarised retroreflective 5m, Laser 10m, Coaxial for Transparents 2 m
- RGB Contrast sensor 6-12 mm, 25kHz switch. freq.
- UV Luminescence sensor 10-30mm, 2kHz switch. freq.
- NO-NC outputs with 2m Cable or M8 connector
- IP67 Plastic case and IP69K stainless steel version
- Ecobal and Diversey certification

TECHNICAL DATA

- Diffuse proximity 90 or 200cm, Laser 90 cm
- Background suppr 30, 60, 120, 200cm, Laser 15, 35 cm
- Retroreflex 13 m, Polarized 8 m, Laser 20 m
- Through-beam 25 m
- 10-30 Vdc version with NO-NC, NPN or PNP output
- Multivoltage 24-240Vac/24-60Vdc with Relay output
- 2m cable or M12 rotatable connector

TECHNICAL DATA

- Diffuse proximity 2 m (-PA), 5 m (-PR)
- Background suppression 2 m (-PA), 2.5 m (-PR)
- Polarised retroreflex 7 m (-PA), 22 m (-PR)
- Through-beam 50 m (-PA), 60 m (-PR)
- 10-30 Vdc version with NPN or PNP outputs
- Multivoltage with Relay output and terminal block
- Configurable timing function for turn-ON/OFF delay
- IP67 plastic case, fiber glass reinforced

APPLICATIONS

- Processing and Packaging machinery
- Food and Beverage Industry
- Cosmetic and Pharmaceutical industry
- Electronics assembling

APPLICATIONS

- Processing and Packaging machinery
- Conveyor lines, Material Handling
- Automotive assembly, intra-logistics

APPLICATIONS

- Packaging end of line, palletizers
- Outdoor or indoor gates control
- Manufacturing plants

Area sensors

AS1/DS1



High resolution area sensor
Detection and measurement of small objects
crossing the area, even in a random positions

Dimensional sensors

DS2



Dimensional sensor with extended
controlled heights
Set controls based on height or width
measurement and object positioning

Distance sensors

S85



Long distance sensor based on TOF
Accurate controls based on a target
object distance and improved cost saving

TECHNICAL DATA

- AS1 Area Sensor for small object detection
- DS1 Light Array for small object measurement
- Minimum object detection \varnothing 6 mm or flat 0.2x75 mm
- Minimum measurement resolution 7 mm or 4 mm
- Heights ranging from 100 mm (16 beams) to 300 mm (48 beams)
- Standard distance 2 m and Long distance up to 4 m
- PNP switching output and 0-10 V analog output

TECHNICAL DATA

- Measurement light array with IR parallel beams
- Controlled heights from 150 to 2400 mm (n x 150 mm)
- Standard resolution 25mm, high resolution 6 mm
- Standard distance 5 m and Long distance 10m
- PNP switching output with configurable function
- 0-10 V analog output with configurable function
- RS-485 or Ethernet port and Graphic User Interface

TECHNICAL DATA

- Time Of Flight (TOF) sensor with Red Laser em.
- Detection and measuring range up to 10 or 20m
- 1mm resolution/repeatability and 7mm accuracy
- 4-20mA or 0-10V scalable analog output and 2 push-pull digital outputs
- RS485 serial interface
- Built-in graphic display and push buttons
- Standard M12 8-poles connector
- IP67 compact metal housing

APPLICATIONS

- Processing and Packaging machinery
- Food, Cosmetic and Pharma industries
- Electronics and mechanical assembling
- Conveyor lines and sorting systems

APPLICATIONS

- Secondary Packaging eg. cartoners
- Automated vertical warehouses
- Automotive assembling eg. paint shop
- Non-LFT measurement in logistics

APPLICATIONS

- Packaging end of line
- Paper reel unwinding control
- Automated warehousing
- Trans-elevator and crane positioning
- Automotive assembling lines
- Non-LFT measurement in logistics



M18 tubular sensors

S15

Short barrel and IP69K protection plastic or stainless steel case
Space and cost saving, performs in harsh environments including in the presence of water-jets and aggressive cleaning agents

TECHNICAL DATA

- Diffuse proximity 10, 35, or 100 cm, Fix focus 5 cm
- Background suppression 40-120 mm
- Retroreflex 5 m, Polarised 4 m, for Trasparent 1m
- Through-beam 20 m
- L/D input, 2m Cable, M12 connector, or pig-tail vers.
- IP 69K Plastic or Stainless steel case
- Johnson Diversey certification for industrial detergents

APPLICATIONS

- Processing and packaging machinery
- Assembling and conveyor lines



M18 tubular sensors

S50/S51

Standardization of the same M18 housing with mounting holes, installation and wiring for all optic functions. Further cost saving with S51 basic line

TECHNICAL DATA

- Diffuse proximity 10, 40, or 70 cm, and Laser 35 cm
- Fix-focus 100 mm and Background suppr. 50-100 mm
- Polarised RRX 4 m, Laser 16 m, for Trasparent 1m
- Through-beam 20 m and Laser 60 m
- Contrast sensor 10 mm, Luminescence sensor 20 mm
- 2m Cable or M12 connector with NO-NC outputs
- Axial or Radial optics, Plastic flat or Metal M18 case

APPLICATIONS

- Processing and Packaging machinery
- Assembling and conveyor lines
- Automatic material handling
- Automated warehousing



Fiber Optic Amplifiers

S7

High resolution, fiber optic sensor detection of small objects through fiber optic cable, even in confined spaces and high temperature environments. Installation of the sensor far from detection object

TECHNICAL DATA

- Diffuse fiber optics 25, 50, 100 mm
- Through-beam fiber optics 75, 150, 300 mm
- Red or White LED emission for contrast detection
- 4-digit display and teach-in or trimmer setting
- 10 bits (1024 points) or 12 bits (4096 points) resolution
- Switching Freq. 1kHz, Fast 5kHz, Ultra-fast 10kHz
- NPN or PNP output with 2m cable or M8 connector

APPLICATIONS

- Processing and Packaging machinery
- Electronics assembling
- Pharmaceutical industry



Ultrasonic sensor

US

Distance measurement
Accurate positioning or distance control, immune to object color or light reflection

TECHNICAL DATA

- M18 background suppression with range 5 - 50 cm and through beam up to 60 cm
- M30 with range 0.2 - 2 m and min object 10 mm
- M50 with range 0.2 - 8 m and min object 20 mm
- Teach-in push-button and remote teach input
- NPN and PNP switching outputs for object detection
- 0-10 V or 4 - 20 mA analog out for distance measure
- High resolution to 1 mm or 0.1% of distance range

APPLICATIONS

- Packaging machinery
- Beverage and bottling plants
- Paper reel unwinding control



Inductive proximity

IS

Non-contact detection
Cost effective and reliable detection of any metal part


TECHNICAL DATA

- Standard proximity M4, M5, M8, M12, M18, M30
- Double range (i.e. M12 4mm, M18 14mm, M30 20mm)
- Unshielded or shielded models for flush mounting
- Nickel brass or Stainless steel short and long housing
- Ecolab and Diversey certification industrial detergents
- Multi-voltage, Metal face, Weld field immune models
- NO/NC, NPN or PNP output and programmable vers.

APPLICATIONS

- Processing and packaging machinery
- Assembling and conveyor lines
- Metal working and machine tools

SENSORS ACCESSORIES

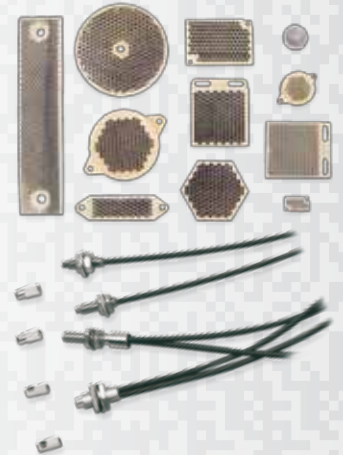

- High efficiency reflectors for longer operating distance
- Micro-prismatic reflectors for high resolution detection
- High temperature, Extra-flexible, High efficiency fibers
- Fiber optics light array, Fiber units with focusing lens
- Cables with axial or right angle M8 or M12 connectors
- Plastic support and metal bracket for sensor mounting

Safety Light Curtains

SG2/SG4 BASE

Finger and hand presence safety detection with basic functions
High reliability, easy installation and alignment, improved cost saving



TECHNICAL DATA

- Safety Type 2 (PI=d, SIL2); Safety Type 4 (PI=e, SIL3)
- Resolution Finger 14mm; Hand 30mm; Pres. 50/90mm
- Controlled heights from 150 to 1800mm (n x 150mm)
- Operating distance: Finger 6m; Hand 19m; Pres. 9/19m
- Auto/Manual restart; EDM; Anti-interference coding
- Easy and cost effective standard M12 5-pole connector

APPLICATIONS

- Automatic machinery
- Metalworking, Woodworking
- Manufacturing (textile, ceramics, etc)
- Material handling, assembling lines

Safety Light Curtains

SG4 EXTENDED

Finger and hand safety detection with programmable functions
Extended flexibility that fits a diverse range of machine needs, with remote configuration or monitoring and configuration cloning features



TECHNICAL DATA

- Programmable Safety Light Curtain Type 4 (PI=e, SIL3)
- Resolution: Finger 14 mm; Hand 30 mm
- Controlled heights from 300 to 1800mm (n x 150mm)
- Operating distance: Finger 7m; Hand 20m
- Compact; No dead zone; up to 3 cascable units
- Fully programmable: Auto/Man restart, EDM, coding, Muting (T/L, total/partial, with/without timeout, etc.), Fixed/floating blanking; reduced resolution function
- Ethernet Port, SG Dongle and Graphic User Interface

APPLICATIONS

- Processing and packaging machines
- Automotive, metalworking, presses
- Manufacturing assembly lines

Safety Light Curtains

SG BODY COMPACT

Body safety protection and perimeter access control
High reliability, easy installation and alignment, improved cost savings



TECHNICAL DATA

- 35x40 mm standard compact profile
- 2, 3, 4 Beams for Body protection and access control
- Controlled heights 500, 800, 900, 1200 mm
- Long operating distance up to 50 m
- Dip-switch configuration of Auto/Man, EDM, Coding
- Muting version with L or T integrated arms and lamp
- Easy and cost effective standard M12 connectors


APPLICATIONS

- Light Palletizer/de-palletizers
- Conveyor lines
- Automated warehousing
- Manufacturing lines

Safety Light Curtains

SG BODY BIG

Body safety protection and perimeter access control
Robust product with high reliability and easy installation



TECHNICAL DATA

- 52x56mm profile with improved mechanical resistance
- 2, 3, 4 Beams for Body protection and access control
- Controlled heights 500, 800, 900, 1200mm
- Longer operating distance 60m
- Dip-switch configuration of Auto/Man, EDM, Coding
- Muting version with integrated arms and top-lamp
- Reflector version with active unit and passive unit

APPLICATIONS

- Palletizing/de-palletizing areas
- Automotive, robotized lines
- Automated storage and retrieval
- Automated warehousing
- AGV and Forklift area protection

Safety Controller

SG BWS

Body safety protection and perimeter access control
Cost effective, Flexible safety layout and system configuration



TECHNICAL DATA

- Configurable safety control units type 4 (PI=e, SIL3)
- Dip-switch configuration of Auto/Man restart, EDM
- SG-BWS-T4-MT with single or double muting function
- Controlling 2 light curtains or 1-4 safety light beams:
 - S5 operating distance 0-8m, Laser 0-40m
 - S300 operating distance 0-40m
 - Double PNP output or SPST Relay 250Vac/24Vdc 5A

APPLICATIONS

- Light Palletizer/de-palletizers
- Conveyor lines
- Automated warehousing
- Manufacturing lines

SAFETY ACCESSORIES



- Mirrors
- Protective stands
- Protective shields
- Safety modules
- Safety relays
- Muting boxes
- Muting arms
- Muting lamps
- Laser pointer
- Brackets

HEADQUARTERS

Datalogic Automation Srl

Via Lavino, 265
40050 Monte San Pietro - Bologna - Italy
Tel. +39 051/6765611
Fax +39 051/6759324
info.automation.it@datalogic.com

BRANCHES AND SALES OFFICES

EUROPE BENELUX

Datalogic Automation Benelux

Newtonweg 3
4104 BK Culemborg
The Netherlands
Tel. +31 345/589489
Fax +31 345/511419
info.automation.nl@datalogic.com

FRANCE

Datalogic Automation Srl

Succursale en France
Le Parc Technologique de Lyon
333 cours du 3ème Millénaire - Le Pôle
69800 Saint Priest
Tél. +33 (0)4/72476180
Fax +33 (0)4/72470721
info.automation.fr@datalogic.com

GERMANY

Datalogic Automation Srl

Niederlassung Central Europe
Gottlieb-Stoll-Strasse 1,
73271 Holzmaden
Tel. +49 7023 7453-100
Fax +49 7023 7453-129
info.automation.de@datalogic.com

ITALY

Datalogic Automation Srl

Via Lavino, 265
40050 Monte San Pietro - Bologna
Tel. +39 051/6765611
Fax +39 051/6759324
info.automation.it@datalogic.com

Datalogic Automation Srl

LASER MARKING

Via Le Gorrey, 10
11020, Donnas - Aosta
Tel. +39-0125-8128201
Fax +39-0125-8128401
info.automation.it@datalogic.com

Via Dell'Industria 15, 21018
Sesto Calende - Varese
Tel. +39-03319180601
Fax +39-03319180801
info.automation.it@datalogic.com

SPAIN

Datalogic Automation Iberia

Sucursal en España
C/Samontà, 21 Planta baja, Local 0
08970 Sant Joan Despí - Barcelona
Tel. +34 (0)93/4772059
Fax +34 (0)93/4777272
info.automation.es@datalogic.com

NORDIC

Datalogic Automation AB

Höjdrodergatan 21
21239 Malmö - Sweden
Tel. +46 (0)40/385000
Fax +46 (0)40/385001
info.automation.se@datalogic.com

UNITED KINGDOM

Datalogic Automation UK

Datalogic House
Dunstable Road, Redbourn - Hertfordshire
AL3 7PR
Tel. +44 (0) 1582 791750
Fax +44 (0) 1582 791769
info.automation.uk@datalogic.com

TURKEY

Datalogic ADC Turkey

No:16 Neo Vista Sitesi C1 Blok D.7
Gokturk/Kemerburgaz
34077 - Istanbul, Turkey
info.adc.tr@datalogic.com

NORTH AMERICA

Datalogic Automation Inc

511 School House Road
Telford, PA 18969-1196 - United States
Tel. +1-800-BAR-CODE or +1-215-723-0981
Fax +1-215-721-5551
info.automation.us@datalogic.com

Datalogic Automation Inc

MACHINE VISION

5775 W Old Shakopee Rd
STE 160, Bloomington, MN 55437 United States
Tel. +1-952-996-9500
Fax +1-952-996-9501
info.automation.us@datalogic.com

SOUTH AMERICA

Datalogic Brazil

Rua Arandu, 281 CJ 32 Broklin Novo, 04562-030
Sao Paulo, Brazil
Tel. +55 11 5507 7721
orders.ia.int@datalogic.com

APAC

AUSTRALIA-NEW ZEALAND

Datalogic Automation Pty Ltd

Unit 130, 45 Gilby Road
Mt Waverley - Victoria, 3149 - Australia
Tel. +61 (0)3/95589299
Fax: +61 (0)3/95589233
info.automation.au@datalogic.com

CHINA

Datalogic Automation Asia

Floor 20, Room 2017, Building 2,
16 West Nan San Huan Road
Fengtai District, Beijing
Tel: +86 (0)21-5836 6692
Fax: +86 (0)21-5836 6695
info.automation.cn@datalogic.com

Suite 1301, Hua Rong Plaza,
1289 South Pudong Road, Pudong District
Shanghai 200120
Tel: +86 (0)21-5836 6692
Fax: +86 (0)21-5836 6695
info.automation.cn@datalogic.com

Room 1104B, 5#Tower, Fantasta MIC Plaza,
West Nanghai Road, Nanshan District,
518054 Shenzhen, Guangdong, China
Tel: +86 (0)755-8629 6779
Fax: +86 (0)755-8628 1280
info.automation.cn@datalogic.com

1202, Excellence Build, 128 Yanji Road,
Shibei District, Qingdao, China
Tel: +86 532 55787889
Fax: +86 532 55787890

JAPAN

Idec Datalogic Co. Ltd

10-40, Mikuni-Honmachi 1-Chome,
Yodogawa-ku, Osaka 532 0005
Tel. +81(6) 6398/3200
Fax +81 (6) 6398/3202
www.idljp.com

Rev. 04, 10/2014



9C513800U



THE VISION IS YOURS

www.datalogic.com