

## Linear-Transducer LMR48 - A

Ref.: K-LMR48-A-1

14.11.2013

0102010210

### Advantages

- Customer-specific solutions
- Further interfaces available
- Measures linear movements
- Pressure proof tube housing
- Sensor and tube are separable
- Wear-free detection



### General Data

Supply	
- Supply voltage	12...24 VDC $\pm$ 10 %
Current consumption no load	$\leq$ 100 mA
Measuring principle	magnetostrictive
Measuring length, standard	50...2500 mm
Linearity deviation	$\pm$ 0.04 % + 1 LSB
Hysteresis	0.1 mm
Temperature coefficient	100 ppm/ $^{\circ}$ C
Straight line velocity	no restrictions
Mounting position	no restrictions
Material - Measuring body	Cr/Ni - alloy
Magnet	T4-M33, T4-M22, T4-M20
Analog - Interface	
- Voltage/Current	programmable
- Resolution	12 Bit D/A converter
- Voltage output	0...+10 VDC
- Current output	0...24 mA
- Load resistance (I)	$\leq$ 250 Ohm
Parameter/Function, changeable	Analog Voltage/Current
	Counting direction
Type of parametrization	programmable

Subject to change.

TR-Electronic GmbH  
 Eglisshalde 6  
 78647 Trossingen  
 Tel. +49 (0) 7425 228-0  
 info@tr-electronic.de  
[www.tr-electronic.de](http://www.tr-electronic.de)

# Linear-Transducer LMR48 - A

Ref.: K-LMR48-A-1

14.11.2013

0102010210

## General Data continuation

Prgramming - Tool	TR-Soft: TRWinProg
Cycle time, internal	<= 2 ms
External inputs - F/R	Count direction
- Logic level	"0" < +2V, "1" = Supply

## Environmental conditions


Vibration	
- Specific value	<= 150 m/s <sup>2</sup>
- Specific value	<= 200 m/s <sup>2</sup>
- Sine	5 kHz
- Sine	10...500 Hz
Shock	
- Specific value	<= 500 m/s <sup>2</sup>
- Half sine	11 ms
Immunity to disturbance	DIN EN 61000-6-2
Transient emissions	DIN EN 61000-6-3
Working temperature	
- Standard	-40...+85 °C
Storage temperature, dry	-40...+100 °C
Relative humidity	90 %, non condensing
Protection class	
- Standard	IP65
- Optional	IP69K
Pressure resistance	
- Static	450 bar
- Peak	750 bar

Subject to change.

# Linear-Transducer LMR48 - A

Ref.: K-LMR48-A-1  
 14.11.2013  
 0102010210

## Dimensional drawing

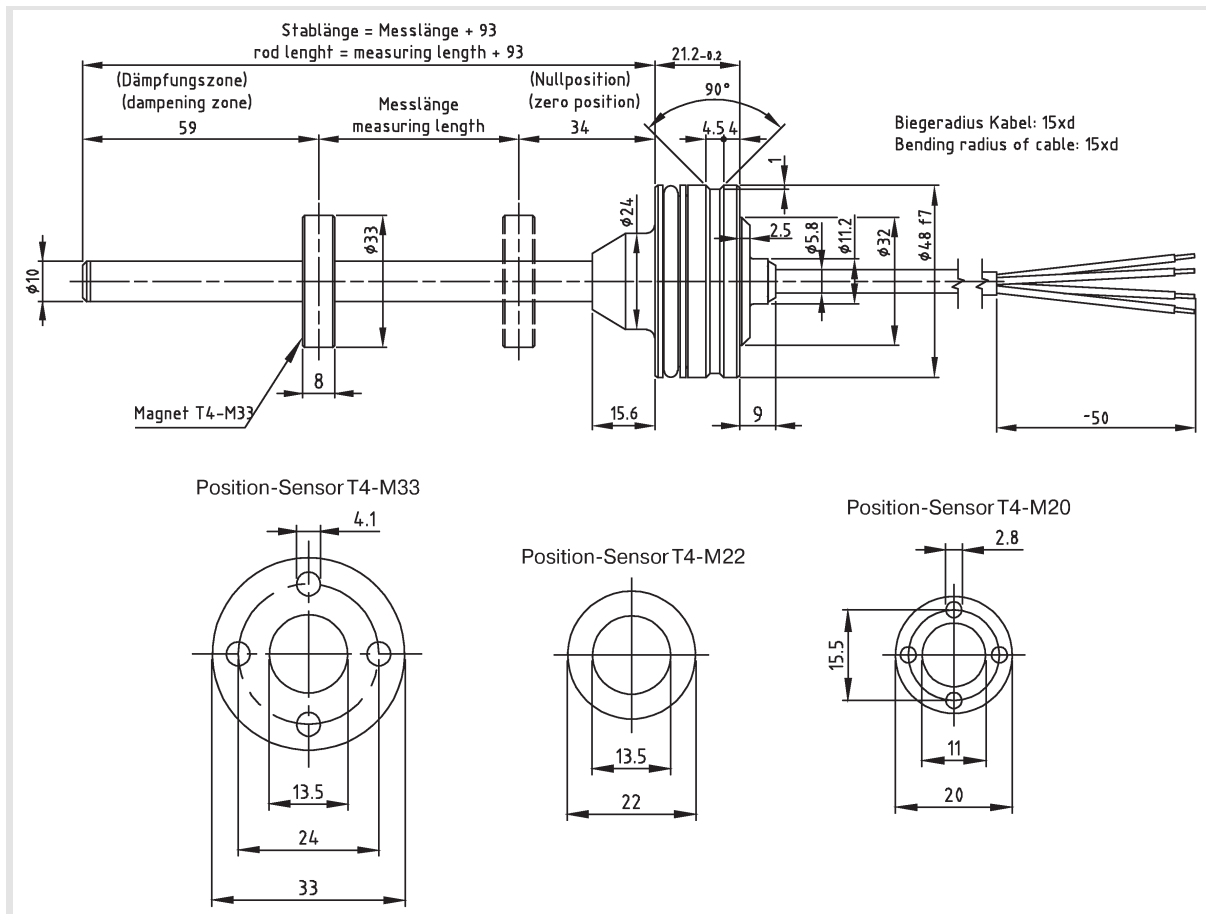

Subject to change.

TR-Electronic GmbH  
 Eglshalde 6  
 78647 Trossingen  
 Tel. +49 (0) 7425 228-0  
 info@tr-electronic.de  
[www.tr-electronic.de](http://www.tr-electronic.de)