

analog input 3210




- 16 bit analog input
- $\pm 20\text{mA}$
- 2 channels, simultaneous sampling
- differential input
- galvanically isolated

I/O

Pinout

LED:	0; (8)	Ch0: positive input current
	1; (9)	Ch1: positive input current
	4; (12)	Ch0: negative input current
	5; (13)	Ch1: negative input current
	E:	failure, red
	P:	power supply, red

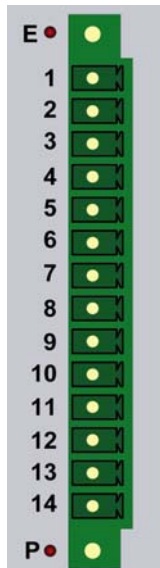

Pin	Signal
1	Ch0+
2	Ch0-
3	AGND
4	Ch1+
5	Ch1-
6	AGND
7	reserved
8	reserved
9	reserved
10	reserved
11	reserved
12	reserved
13	Power +24V=
14	Power 0V

Attributes

Dataformat:

Standard integer (16-Bit) format :

+32767= +20mA

0 = 0mA

-32768 = -20mA

Applications:

16 bit analog input, current sensing

available prints :

- @P3210L: 2 channels, 16 bit analog input, $\pm 20\text{mA}$
- @P3210R: 2 channels, 16 bit analog input, $\pm 20\text{mA}$

Related Applications:

4 channels, current sensing:

- @P3410: 4 channels, 16 bit analog input, $\pm 20\text{mA}$

2/4 channels, voltage sensing:

- @P3200: 2 channels, 16 bit analog input, $\pm 10\text{V}$
- @P3400: 4 channels, 16 bit analog input, $\pm 10\text{V}$

analog

input

Electrical Data

Power supply external	24V= $\pm 20\%$
Operating current.....	40mA at 24V=, typical
Operating current @ctiveBus.....	
Input protection	30V overvoltage, surge
Differential input voltage	60V, maximum
Input resistance	50 Ω
Input capacity.....	160nF
Maximum sampling frequency	
Input frequency	
Resolution / Accuracy	16 bit / 13 bit
No. of converters	2, simultaneous sampling, no multiplexers

analog input 3210

System Information

System ID	0x0189
System adress space	32 bit in, 32 bit out


Environmental Conditions

EMC	EN 61000-4-2 (IEC-801-2) / EN 61000-4-4 (IEC-801-4)
Operating temperature [°C].....	0 .. +55
Storage temperature [°C].....	-20 .. +70
Humidity (rel).....	98 % (non condensing)
Protection class*	IP 20 (DIN 40 050)
*The protection class is valid only with housing and connector installed	


Mechanical Data PCB

Weight.....	approx. 0.05 kg including connector
Dimension.....	105mm x 80mm x 12mm

Drawing (effective if mounted in @M housing)

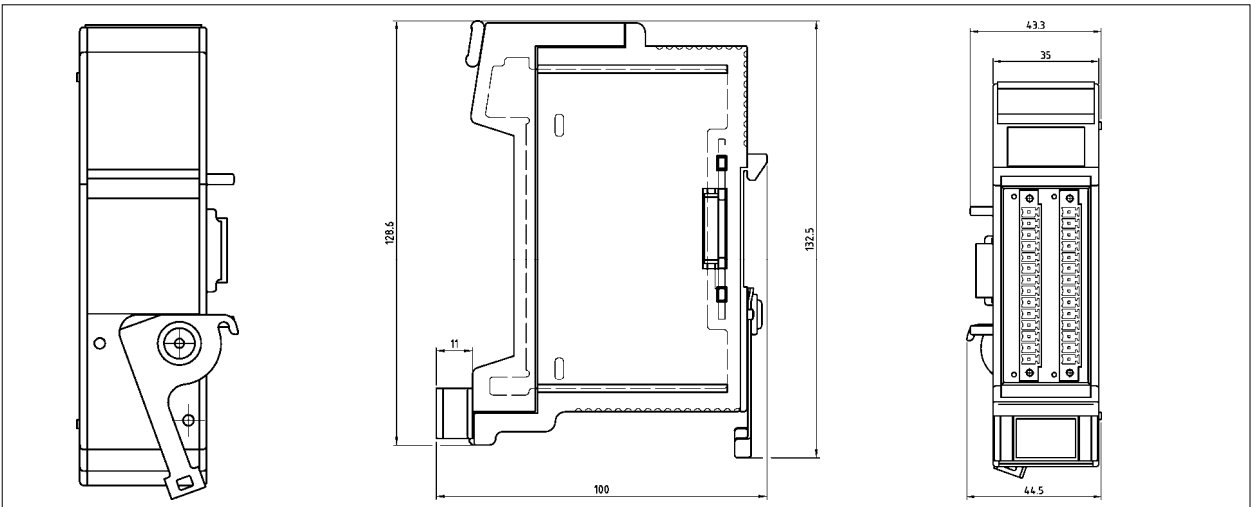

Ordering Key

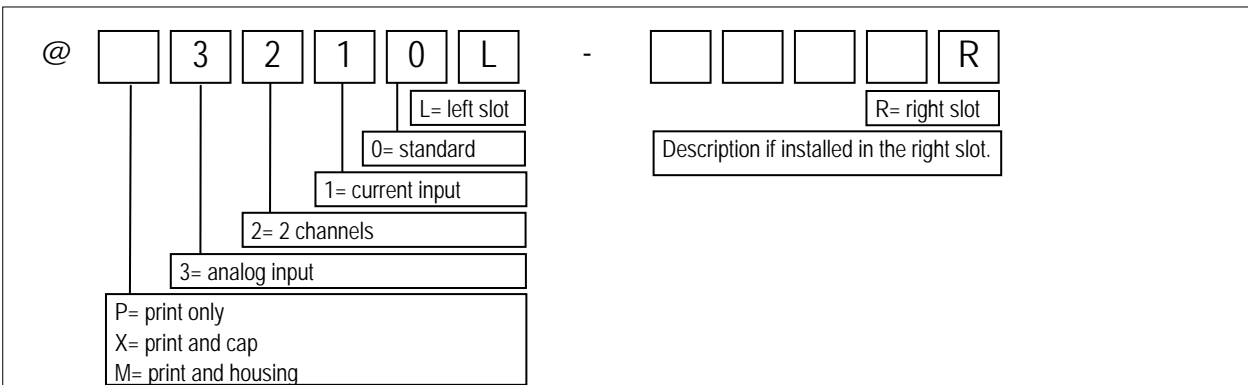

TR-Systemtechnik GmbH, Eglisshalde 16, 78647 Trossingen, Tel.: +49 (0) 7425 228-0, Fax: +49 (0) 7425 228-34, www.activeio.de, info@tr-systemtechnik.de

Example of Application

TR-Systemtechnik GmbH, Eglisshalde 16, 78647 Trossingen, Tel.: +49 (0) 7425 228-0, Fax: +49 (0) 7425 228-34, www.activeio.de, info@tr-systemtechnik.de



I/O

analog

input

analog input 3210

notes:

TR-Systemtechnik GmbH, Eglisshalde 16, 78647 Trossingen, Tel.: +49 (0) 7425 228-0, Fax: +49 (0) 7425 228-34, www.activeio.de, info@tr-systemtechnik.de