

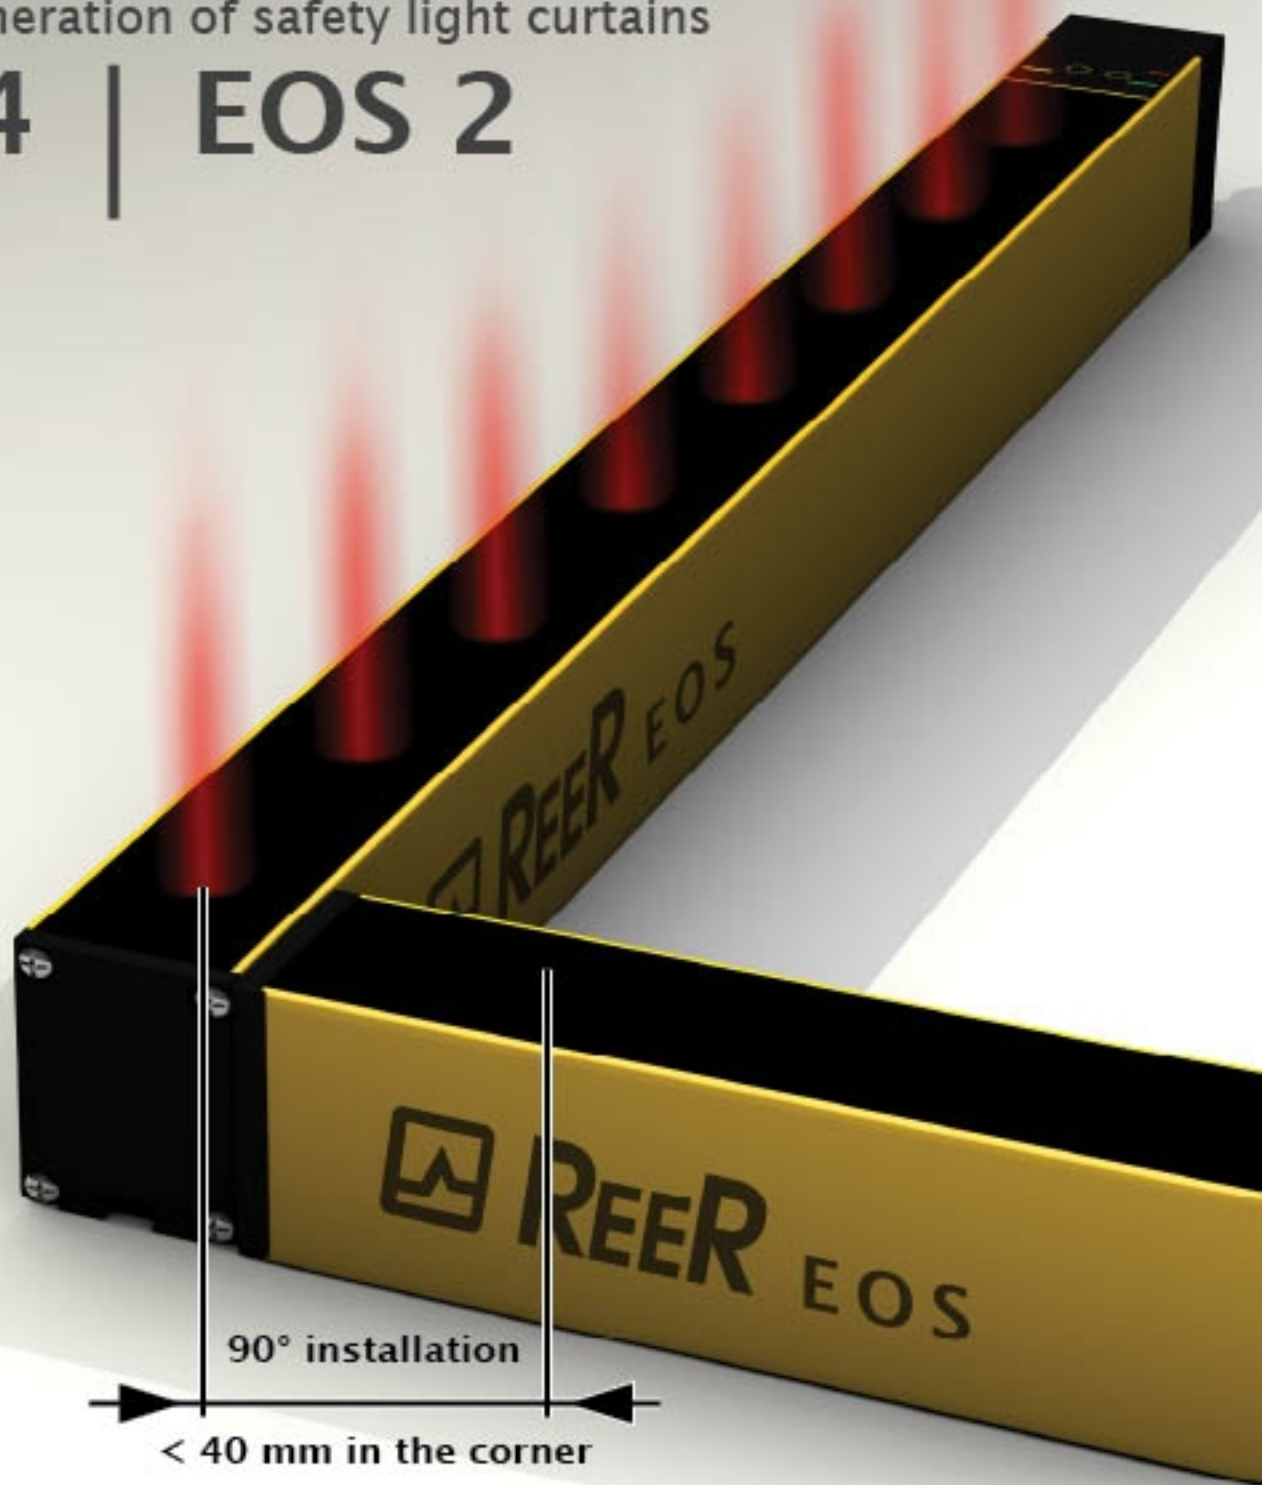


The new generation of safety light curtains

EOS 4 | EOS 2

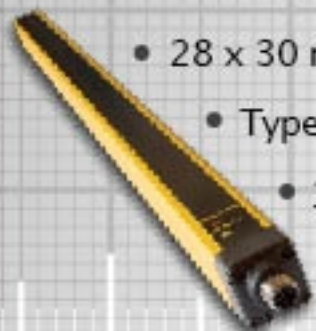


EOS 4 / EOS 2

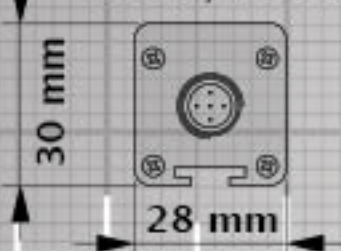

- 28 x 30 mm cross section only
- Type 4, SIL 3, PLc - Type 2, SIL2, PLd
- 14, 20, 30, 40, 50, 90 mm resolution and 2, 3, 4 beams
- IP 67 rating

- M12 connectors with unshielded cables up to 100 m
- Built-in external device monitoring (EDM) and Start/Restart interlock functions
- Max range 12 m (6 m for EOS4 res. 14 mm), 20 m for EOS4 XH and AH
- Protected height 150 to 1500 mm
- Operating temperature -10 to 55° C
- No dead zone on one side
- Certified according: EN 61496-1-2, ISO/EN 13849-1, EN 62061, IEC 61508

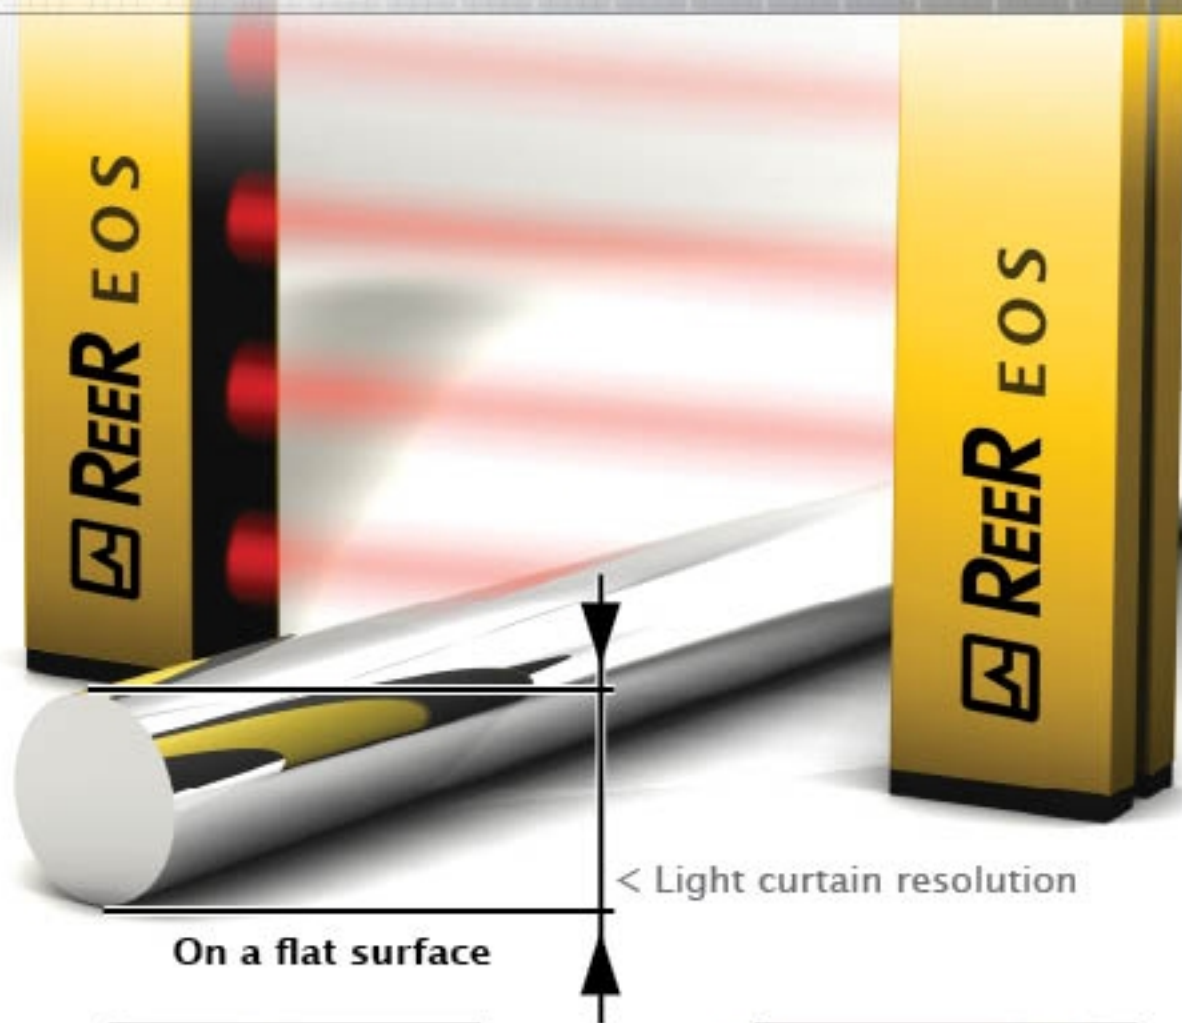

On a flat surface

