




PS24-TL

- Universal input switching supply.
- 24V regulated current.
- Runs on 110-220V DC.
- Excellent output short circuit protection.
- Efficiency: 75% typical, full load.

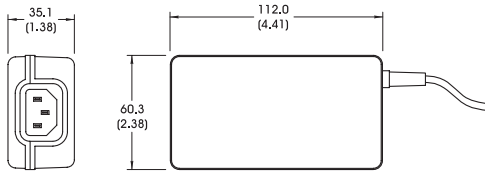

DIMENSION ARE IN MILLIMETERS (INCHES)

PS24

- Conventional DC jack connector.

PS24-TL

- Tinned leads for use with power input terminal block.

General Specifications

Input power:	90 VAC to 264 VAC universal; AC input frequency: 47 Hz to 63 Hz
Output power:	30 Watts
Protection:	Over voltage protection: 150% max., non-latching
Overcurrent protection:	short circuit protected
MTBF:	Calculated MTBF is greater than 100,000
Safety compliance:	1) UL1950; 2) CSA 22.2, No. 950; 3)CSA 22.2, No. 234 Levels 3; 4) IEC 950; 5) TUV/CS (EN60950)
Operating temperature range:	0 to 65 degrees centigrade

Part Number Designation

Standard Product **SHIPPED NEXT DAY**

Optional
tinned
leads

Part Number: **PS24 - XX**
TL