

Absolute-Encoder CEV65 - DN


Ref.: K-CEV65-DN-1

18.11.2013

010102006502020201

Advantages

- _ Customer-specific solutions
- _ Flexible programming
- _ Further interfaces available
- _ Modular mechanical design
- _ Modular product line

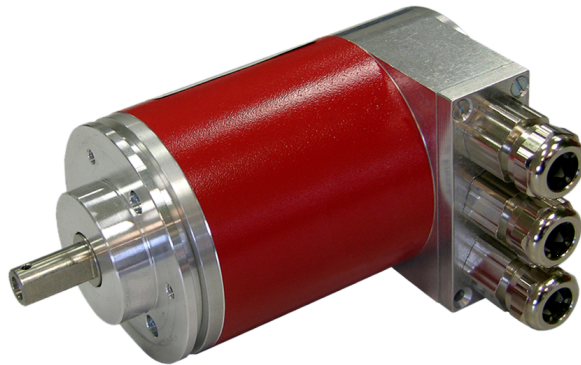

General Data

Supply	
- Supply voltage	11...27 VDC
Current consumption no load	<= 200 mA
Device design	
- Type	Single-/Multi-Turn
Total resolution	<= 25 Bit
Number of steps per revolution	<= 8192
Number of revolutions	<= 4096
CAN DeviceNet - Interface	
- CAN DeviceNet	EN 50325-2
- Bus connection	ISO 11898-1, ISO 11898-2
- CAN Specification 2.0 A	11-Bit Identifier
Transmission rate	
- Specific value	125, 250, 500 kbit/s
- Adjustability	by means of DIP-switches
Parameter/Function, changeable	Resolution
	Output code
	Operating range
	Error outputs
	Preset parameter
	Adjustment - Parameter
	Safety range

Subject to change.

TR-Electronic GmbH
 Eglisshalde 6
 78647 Trossingen
 Tel. +49 (0) 7425 228-0
 info@tr-electronic.de
www.tr-electronic.de

Absolute-Encoder CEV65 - DN

Ref.: K-CEV65-DN-1

18.11.2013

010102006502020201

General Data continuation

	Counting direction
Type of parametrization	programmable
Prgramming - Tool	Fieldbus-Device
Maximum Speed, mechanically	≤ 6000 1/min
Shaft load, axial/radial	≤ 40 N, ≤ 60 N
Bearing life time	$\geq 3.9E+10$ revolutions
Bearing life time - Parameter - Speed	3000 1/min
- Operating temperature	60 °C
- Shaft load, axial/radial	≤ 20 N, ≤ 30 N
Point of origin, shaft load	at the shaft end
Angular acceleration	$\leq 10E+4$ rad/s ²
Moment of inertia, typically	2.5E-6 kg m ²
Start-up torque, 20 °C	2 Ncm
Mass, typically	0.7 kg

Environmental conditions

Vibration	
- Specific value	≤ 100 m/s ²
- Sine	50...2000 Hz
Shock	
- Specific value	≤ 1000 m/s ²
- Half sine	11 ms
Immunity to disturbance	DIN EN 61000-6-2
Transient emissions	DIN EN 61000-6-3
Working temperature	
- Standard	0...+60 °C
- Optional	-20...+70 °C;
Storage temperature, dry	-30...+80 °C
Relative humidity	98 %, non condensing
Protection class	
- Standard	IP65

Subject to change.


Absolute-Encoder CEV65 - DN

Ref.: K-CEV65-DN-1

18.11.2013

010102006502020201

Dimensional drawing

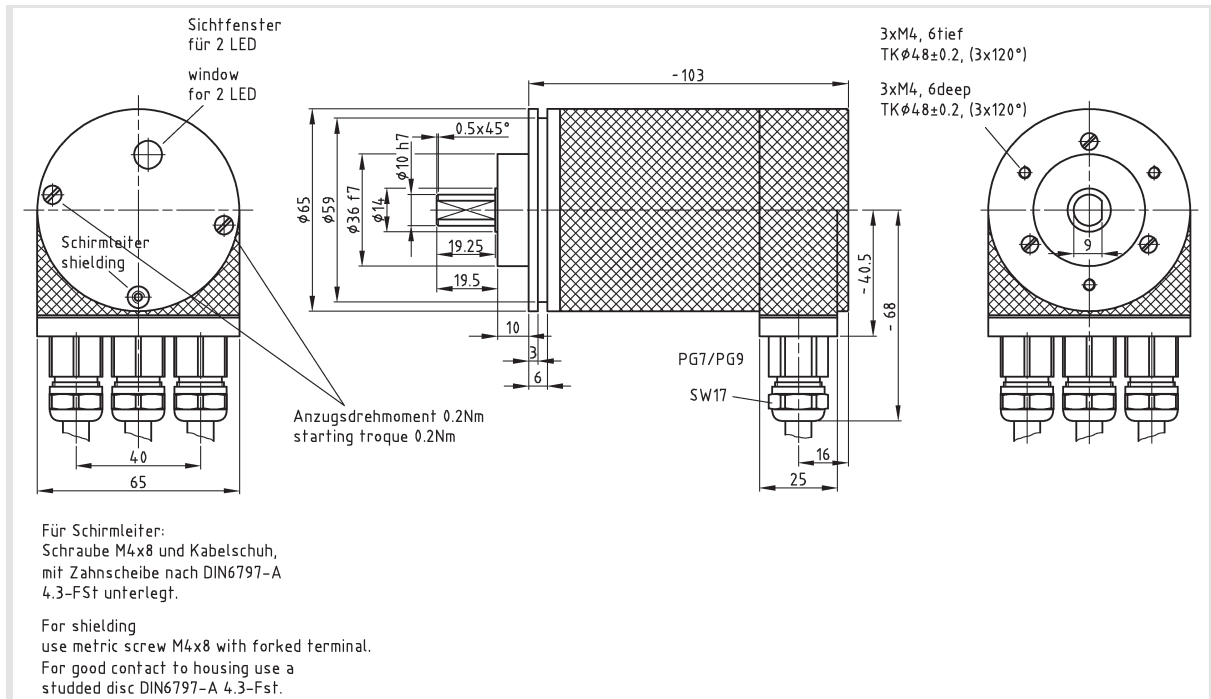

Suggested products

CEV65M*4096/4096 DN 36ZB10FL
Feldbushaube

CEV65M-10076

CEV65M*8192/4096 DN 36ZB10FL
Feldbushaube

CEV65M-10089

Subject to change.