

## **CS420**

# Dual Output Intensity Controller

- (with Digital Interface)
- User interface provides three-button/three digit display. (RS232 programmable as well.)
- **∠i**) Provides independent intensity control for two light outputs.



### Ordering Information


Standard Product: Shipped Next Day

### CS420


P/N: CS420

#### **CS420 Control Applet**

The CS420 Control Applet enables the user to program the intensity levels of up to two lights connected to a CS420 dual output intensity controller. Intensity is expressed as a percentage between 0 and 100 percent, where 0 percent represents minimum intensity and 100 percent maximum intensity. Maximum intensity is calculated based on the SignaTech signature of the light and various controller operating parameters.



### **Dimensional Information**

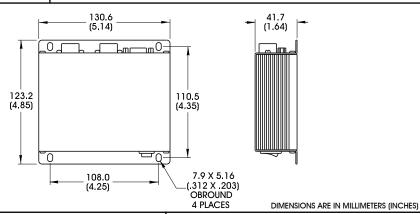

Additional Information

Power Requirements: 1Amp @ 24vDC

Optional Power Supply: Shipped Next Day

P/N: PS-24

#### Standard Product Information

Operating Temperature: 0-40° C

 $C \in$ 

Meets CE standards