



# RL36120 Bright Field Ring Light



**4i** Provides almost twice the illumination of the RL4260

**4i** Available in RGB all color version

## Ordering Information

Standard Product:  
Shipped Next Day

Standard Product Variation:  
Shipped Within Two Weeks

P/N: **RL36120-600200XL**  
Configured for use with  
AI power supply

Mounting Option	Lens Type	Spectral Wavelength	Standard Offset	Field of View	Opt. Power Comp.	Opt. Light Cond.
RL36120 -	X	XXX	XXX	XXX	XX	X
	B D	Blue 470 * Green 520 * Yellow 590 Orange 625 Red 660 Infra-red 880 White WHI * RGB RGB *	See chart to Compute standoff	XXL XL L M S XS	12 24	D P

Version "B" Mounting Option

DIMENSIONS ARE IN MILLIMETERS (INCHES)


Version "D" Mounting Option

DIMENSIONS ARE IN MILLIMETERS (INCHES)

\* Identify desired FOV and standoff, then specify nearest illuminated area size

\*Not available in 12v

## Dimensional Information

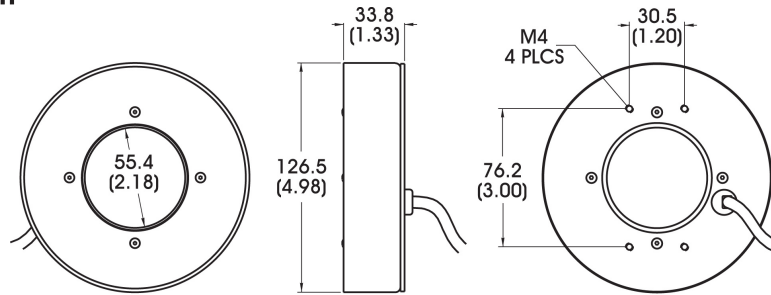

Cable Length: 1.5 Meter (59")

DIMENSIONS ARE IN MILLIMETERS (INCHES)

## Standard Variation Current Specifications

	(blue)	(green)	(yellow)	(orange)	(red)	(infra-red)	(white)	(RGB)
@12v	N/A	N/A	400	400	600	640	N/A	N/A
@24v	480	480	240	240	360	280	480	440

## Standard Product Information

Product Lifetime: 50,000

Operating Temperature: 0-60° C