

DL2230

Diffuse Dome Light

- Ai** A modified, extremely efficient integrating light source
- Ai** Compact, space saving design - ideally suited for inspecting small, specular objects



Ordering Information

Standard Product:
Shipped Next Day

DL2230

P/N: DL2230-660
Configured for use with Ai
Power Supply


Standard Product Variation:
Shipped Within Two Weeks

DL2230	-	XXX	XX
		Spectral wavelength	Optional power Compatibility
		(blue) 470 †	12
		(green) 520 †	24
		(yellow) 590	
		(orange) 625	
		(red) 660	
		(infra-red) 880	
		(White) WHI †	

† Not available in 12v

Optimal working distance:
25.4mm (1")
Effective Working Range:
12.7-50mm (.5"-2")

Dimensional Information

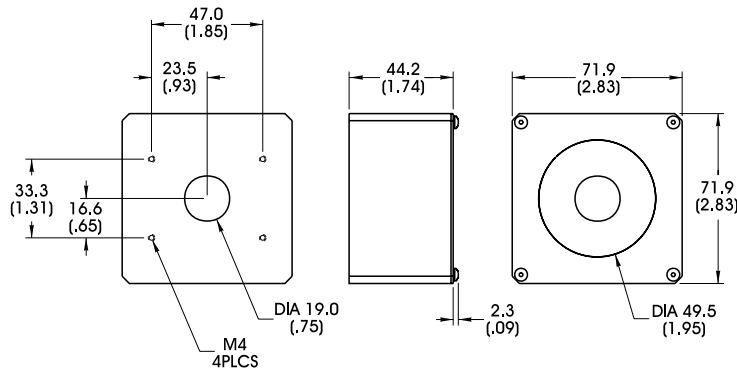

DIMENSIONS ARE IN MILLIMETERS (INCHES)

Standard Variation Current Specifications

	(blue)	(green)	(yellow)	(orange)	(red)	(infra-red)	(white)	(RGB)	
@12	N/A	N/A	120	120	180	210	N/A	N/A	mA
@24	120	120	120	120	90	120	120	N/A	mA

Standard Product Information

Product Lifetime:	50,000 hours
Operating Temperature:	0-60° C