

SL2420

Bright Field Spot Light

- Ai's most popular spot light intense illumination in a small package
- Ai) High contrast on non-reflective objects



Ordering Information

Standard Product: Shipped Next Day


SL2420-660100L

Configured for use with Ai Power Supply

SL2420-660100L24

Configured for use with user supplied 24vDC Power Supply

Standard Product Variation: Shipped Within Two Weeks

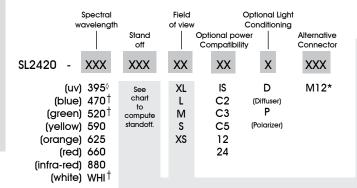

IS = iSU (requires 24v power supply)


C2 = Ai Connector

C3 = Pulsar 710 Connector

C5 = Pulsar 320 Connector

* Available with 24v option only


† Not available in 12v




 $^{\Diamond}$ UV LEDs have a considerably shorter half-life than other LEDs (<1000hrs). For this reason Ai recommends these LEDs be used in strobe mode only. For applications requiring continuous 24v power, contact Ai for assistance.


Light Consistency Information

Intensity Distribution



Intensity Cross Section

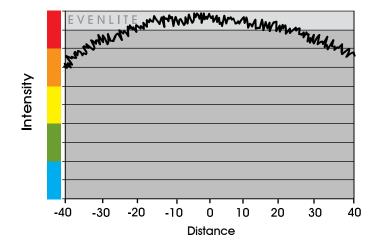

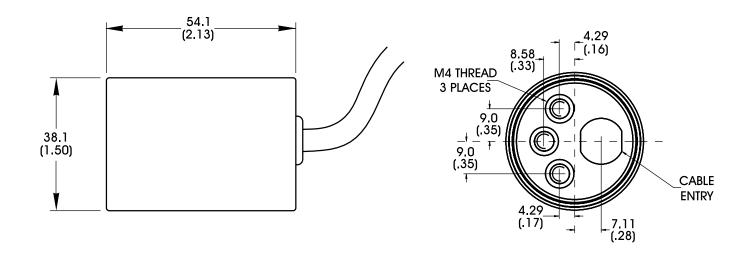

DIMENSIONS ARE IN MILLIMETERS (INCHES)

Standard Variation Current Specifications

	blue	green	yellow	orange	red	infra-red	white	RGB	
@12	N/A	N/A	80	80	120	130	N/A	N/A	mA
@24	75	75	40	40	60	80	75	N/A	mA
Ai	80	80	80	80	120	120	80	N/A	mA

General Specifications

Weight: 194.1 g (6.8oz)

Finish: Black Anodized

Operating Temperature: 0-60° C

Meets Specifications: CE, RoHS

Standard Product Information

Red	Max. Illumination	Irradiance (mW/cm ²)	Illuminance (Lux)	
	Working Distance: 100mm	.82	N/A	
	Lifetime	50,000 hrs		

White	Max. Illumination	Irradiance (mW/cm ²)	Illuminance (Lux)	
	Working Distance: 100mm	1.3	3,800	
	Lifetime	10,000 hrs		

Additional Information