

Linear-Transducer LP46K - A



Ref.: K-LP46-A-1

14.11.2013

0102010130

Advantages

- Adjustment via set-inputs
- Customer-specific solutions
- Further interfaces available
- Measures linear movements
- Profile housing
- Simple integration
- Wear-free detection

General Data

Supply	24 VDC $\pm$ 10 %
- Supply voltage	
Current consumption no load	$\leq$ 100 mA
Measuring principle	magnetostrictive
Measuring length, standard	50...2000 mm, in steps
Resolution	0.001 mm
Linearity deviation	$\pm$ 0.10 mm $\leq$ 1500 mm
	$\pm$ 0.15 mm $>$ 1500 mm
Reproducibility	0.005 mm
Hysteresis	0.02 mm $\leq$ 1500 mm
	0.1 mm $>$ 1500 mm
Temperature coefficient	$<$ 40 ppm/ $^{\circ}$ C
Straight line velocity	no restrictions
Mounting position	no restrictions
Material - Measuring body	Aluminium extruded profile
Magnet	Slider
	other on request
Analog - Interface	
- Voltage/Current	Factory setting
- Resolution	16 Bit D/A converter
- Voltage output	-10...+10 VDC

Subject to change.

TR-Electronic GmbH
 Eglisshalde 6
 78647 Trossingen
 Tel. +49 (0) 7425 228-0
 info@tr-electronic.de
www.tr-electronic.de

Linear-Transducer LP46K - A

Ref.: K-LP46-A-1

14.11.2013

0102010130

General Data continuation

- Load resistance (U)	$\geq 0.68 \text{ k}\Omega$
- Current output	0...20 mA
- Load resistance (I)	$\leq 500 \text{ }\Omega$
Cycle time internal, $\leq 1.00 \text{ m}$	0.50 ms
Cycle time internal, $\leq 1.50 \text{ m}$	0.75 ms
Cycle time internal, $\leq 2.00 \text{ m}$	1.00 ms
External inputs	
- Set-Input 1	Analog initial point
- Set-Input 2	Analog end point
- Logic level	"0" < +2V, "1" = Supply

Environmental conditions

Vibration	
- Specific value	$\leq 100 \text{ m/s}^2$
- Sine	50...2000 Hz
Shock	
- Specific value	$\leq 1000 \text{ m/s}^2$
- Half sine	11 ms
Immunity to disturbance	DIN EN 61000-6-2
Transient emissions	DIN EN 61000-6-3
Working temperature	
- Standard	0...+70 °C
- Optional	-20...+70 °C;
Storage temperature, dry	-30...+85 °C
Relative humidity	98 %, non condensing
Protection class	
- Standard	IP65
Stray magnetic field	< 3 mT
Measuring reference	Measuring plane

Subject to change.


Linear-Transducer LP46K - A

Ref.: K-LP46-A-1

14.11.2013

0102010130

Dimensional drawing

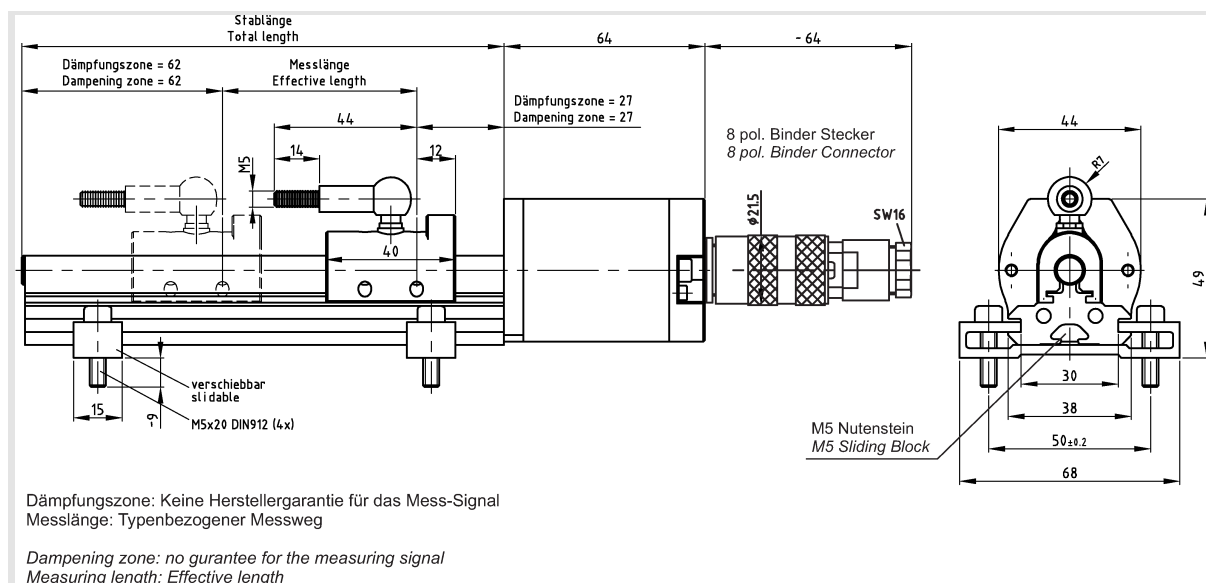

Suggested products

LP_46K*750 ANA_I+JUSTAGE +JUSTAGE 4...20mA 16 bit incl. Gegenst.	320-00232
LP_46K*150 ANA_I+JUSTAGE +JUSTAGE 4...20mA 16 bit incl. Gegenst.	320-00257
LP_46K*300 ANA_I+JUSTAGE +JUSTAGE 4...20mA 16 bit incl. Gegenst.	320-00258
LP_46K*500 ANA_I+JUSTAGE +JUSTAGE 4...20mA 16 bit incl. Gegenst.	320-00321
LP_46K*1000 ANA_I+JUSTAGE +JUSTAGE 4...20mA 16 bit incl. Gegenst.	320-00370

Subject to change.