


Linear-Transducer LA66K - P

Ref.: K-LA66-P-1

18.11.2013

0102010060

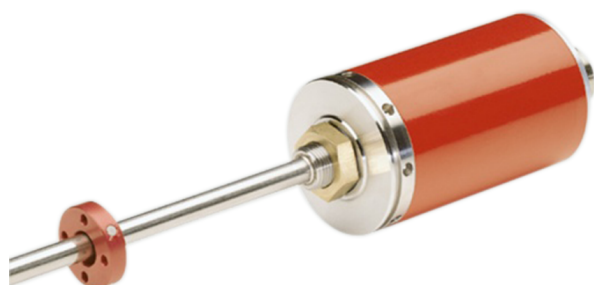

Advantages

- Customer-specific solutions
- Flexible programming
- Further interfaces available
- Measures linear movements
- Perfect fit for cylinders
- Pressure proof tube housing
- Wear-free detection

General Data

Supply	
- Supply voltage	24 VDC, -20...+10 %
Current consumption no load	<= 250 mA
Measuring principle	magnetostrictive
Measuring length, standard	150...3000 mm, in steps
Resolution	0.01 mm
Linearity deviation	< 0.05 %
Reproducibility	0.01 mm
Hysteresis	0.1 mm
Temperature coefficient	< 8 $\mu\text{m}/^\circ\text{C}$ <= 500 mm
	< 15 ppm/ $^\circ\text{C}$ > 500 mm
Straight line velocity	no restrictions
Mounting position	no restrictions
Material - Measuring body	Cr/Ni - alloy
Rod end mounting	Option
Magnet	T4-M33
	other on request
Parallel - Interface	
- Parallel Output	Position data
- Push-Pull	11...27 VDC
- Open Collector/Emitter	<= 35 VDC, Pull-Up/Pull-Down

Subject to change.

TR-Electronic GmbH
 Eglisshalde 6
 78647 Trossingen
 Tel. +49 (0) 7425 228-0
 info@tr-electronic.de
www.tr-electronic.de

Linear-Transducer LA66K - P

Ref.: K-LA66-P-1

18.11.2013

0102010060

General Data continuation

- Output current	$\leq 100 \text{ mA}$
Parameter/Function, changeable	Resolution
	Output code
	Preset parameter
	Counting direction
Type of parametrization	programmable
Programming - Tool	TR-Soft: TRWinProg
	TR-Tool: PT-100-N
Cycle time, internal	see dimensional drawing
External inputs	
- F/R	Count direction
- Preset	electronic adjustment
- Latch	Storage of the output data
- Bus	Set outputs to Tristate
- Logic level	"0" $< +2\text{V}$, "1" = Supply

Environmental conditions

Vibration	
- Specific value	$\leq 100 \text{ m/s}^2$
- Sine	50...2000 Hz
Shock	
- Specific value	$\leq 1000 \text{ m/s}^2$
- Half sine	11 ms
Immunity to disturbance	DIN EN 61000-6-2
Transient emissions	DIN EN 61000-6-3
Working temperature	
- Standard	0...+70 °C
- Optional	-20...+70 °C;
Storage temperature, dry	-30...+85 °C
Relative humidity	98 %, non condensing
Protection class	
- Standard	IP65
Stray magnetic field	$< 3 \text{ mT}$
Measuring reference	Measuring plane
Pressure resistance	
- Optional	600 bar, static

Subject to change.


Linear-Transducer LA66K - P

Ref.: K-LA66-P-1

18.11.2013

0102010060

Dimensional drawing

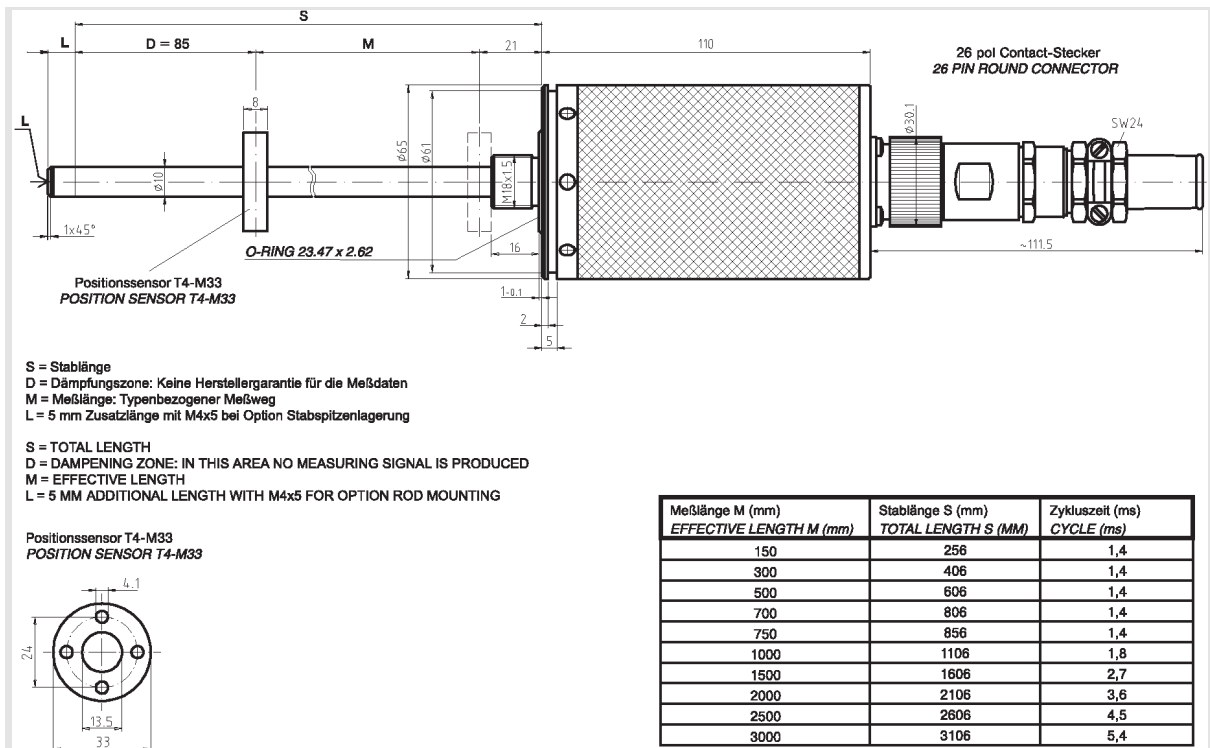

Subject to change.