

Absolute-Encoder CES58 - ES3



Ref.: K-CES58-ES3-1

18.11.2013

010102005802030203

Advantages

- _ Further interfaces available
- _ Modular mechanical design
- _ Modular product line

General Data

Supply	
- Supply voltage	11...27 VDC
Device design	
- Type	Single-/Multi-Turn
Total resolution	<= 25 Bit
Number of steps per revolution	<= 8192
Number of revolutions	<= 4096
SERCOS III - Interface	
- SERCOS III	IEC 61784-2, IEC 61158
- Physical Layer	Fast Ethernet, ISO/IEC 8802-3
- Device profile	Encoder Profile
Transmission rate	
- Specific value	100 MBit/s
Parameter/Function, changeable	Zero adustment
	Counting direction
Type of parametrization	programmable
Prgramming - Tool	Fieldbus-Device
Maximum Speed, mechanically	<= 12000 1/min
Shaft load, axial/radial	Own mass
Bearing life time	>= 3.9E+10 revolutions
Bearing life time - Parameter	
- Speed	6000 1/min

Subject to change.

TR-Electronic GmbH
 Eglishalde 6
 78647 Trossingen
 Tel. +49 (0) 7425 228-0
 info@tr-electronic.de
www.tr-electronic.de

Absolute-Encoder CES58 - ES3

Ref.: K-CES58-ES3-1

18.11.2013

010102005802030203

General Data continuation

- Operating temperature	60 °C
Angular acceleration	$\leq 10E+4 \text{ rad/s}^2$
Moment of inertia, typically	$2.5E-6 \text{ kg m}^2$
Start-up torque, 20 °C	2 Ncm
Mass, typically	0.3...0.5 kg

Environmental conditions

Vibration	
- Specific value	$\leq 100 \text{ m/s}^2$
- Sine	50...2000 Hz
Shock	
- Specific value	$\leq 1000 \text{ m/s}^2$
- Half sine	11 ms
Immunity to disturbance	DIN EN 61000-6-2
Transient emissions	DIN EN 61000-6-3
Working temperature	
- Standard	0...+60 °C
- Optional	-20...+70 °C;
Storage temperature, dry	-30...+80 °C
Relative humidity	98 %, non condensing
Protection class	
- Standard	IP65

Subject to change.


Absolute-Encoder CES58 - ES3

Ref.: K-CES58-ES3-1

18.11.2013

010102005802030203

Dimensional drawing

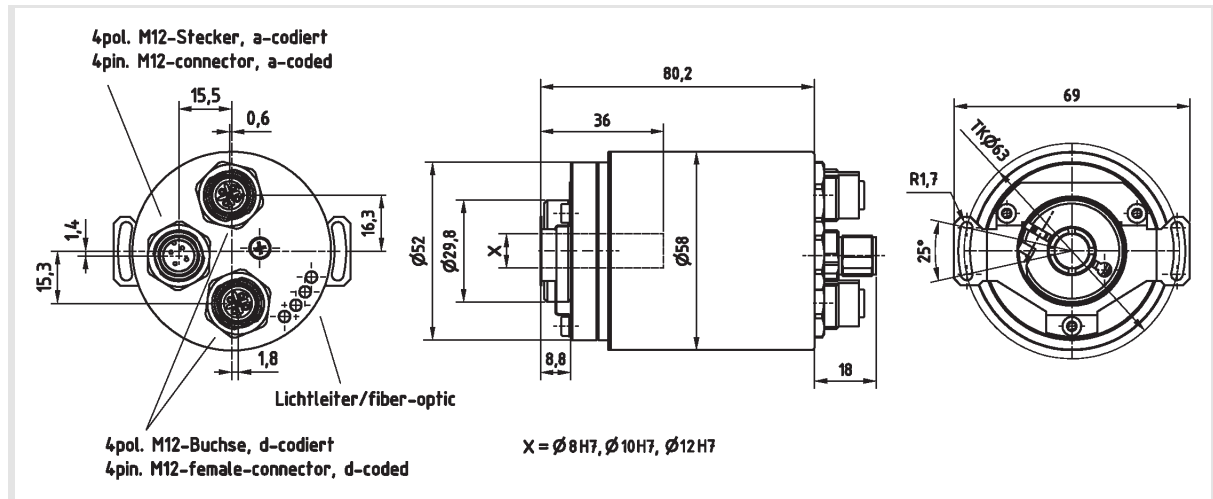

Subject to change.