
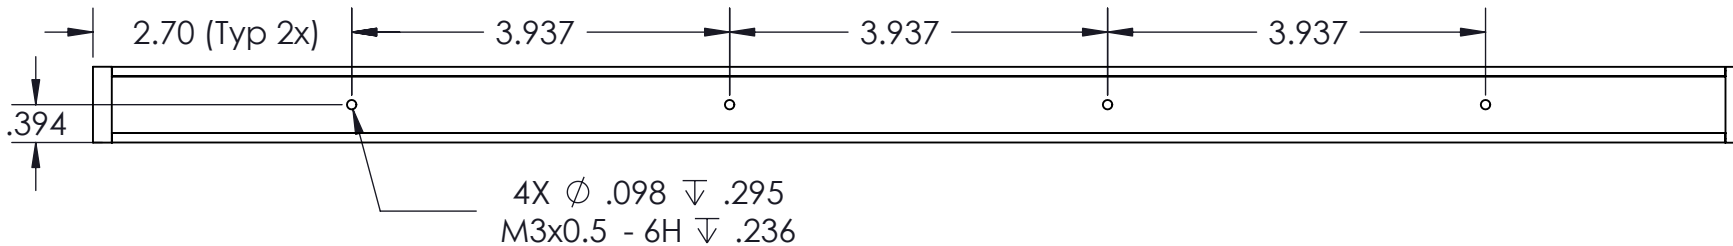


Notes:

1. 12v DC Single Bright White SMD
Working Distance = 1"
2. Label part with p/n, rev letter,
and +12vDC
3. Total current draw= 1800 +/- 10%
4. Cable termination is flying leads

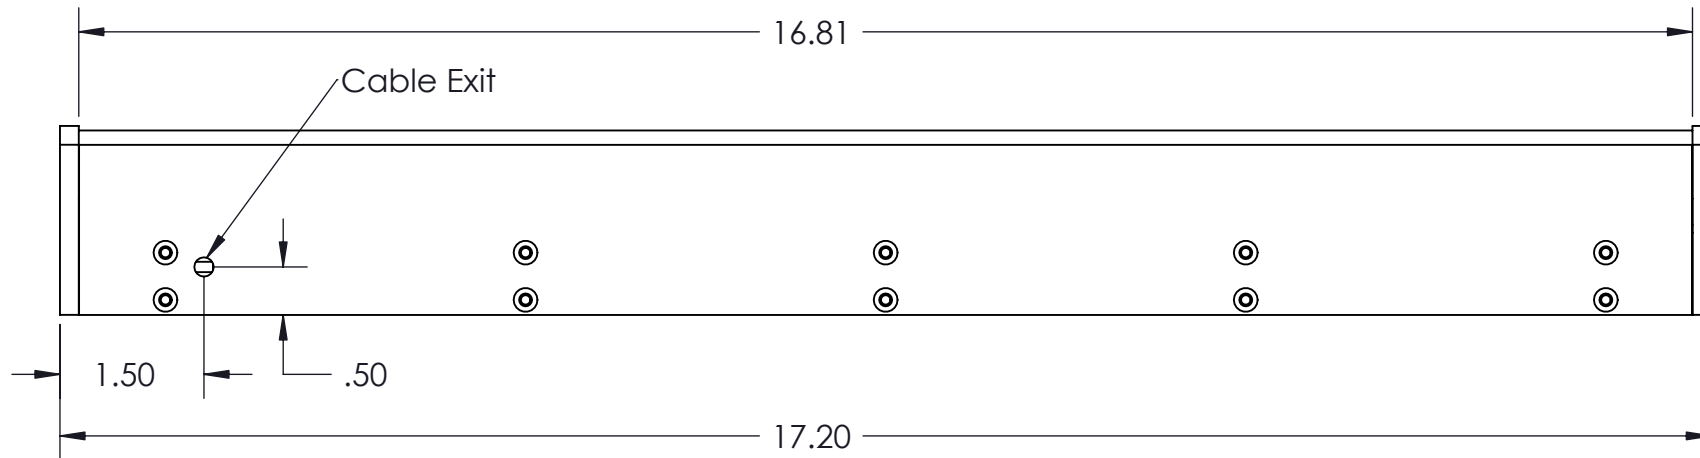

REV	DESCRIPTION	ECN	DATE

INFORMATION HEREIN IS PROPRIETARY TO VOLPI MANUFACTURING AND CANNOT BE REPRODUCED OR USED IN ANY MANNER WITHOUT SPECIFIC WRITTEN APPROVAL OF VOLPI MANUFACTURING USA

	FINISH	DWN. TSD	<small>UNLESS OTHERWISE SPECIFIED DIM ARE IN INCHES</small> FRACT. ± 1/16 XX ± 0.01 XXX ± 0.005 angle ± 1/2°	SHEET 1:1
	MATERIAL	DATE 7-21-08		
	ALL MACHINED SURFACE 63	APPROVED		
		SCALE		
SIZE A	DESC. 16.8 Bright White SMD LL	DWG. NO. 60052.000		REV E1