

Absolute-Encoder CMK58 - A

Ref.: K-CMK58-A-1

18.11.2013

010102005801010204

Advantages

- _ Current- or voltage output
- _ Further interfaces available
- _ Rugged standard solution
- _ Short lead times
- _ Small construction



General Data

Supply	
- Supply voltage	12...30 VDC
Current consumption no load	<= 150 mA
Device design	
- Type	Single-/Multi-Turn
Total resolution	<= 24 Bit
Number of steps per revolution	<= 4096
Number of revolutions	<= 4096
Accuracy	$\pm 0,5^\circ$
Analog - Interface	
- Voltage/Current	programmable
- Resolution	12 Bit D/A converter
- Voltage output	-10...+10 VDC
- Load resistance (U)	≥ 1 kOhm
- Current output	0...24 mA
- Load resistance (I)	<= 500 Ohm
Cycle time	500 μ s
Parameter/Function, changeable	Resolution
	Analog Voltage/Current
	Preset parameter
	Counting direction

Subject to change.

TR-Electronic GmbH
 Eglisshalde 6
 78647 Trossingen
 Tel. +49 (0) 7425 228-0
 info@tr-electronic.de
www.tr-electronic.de

Absolute-Encoder CMK58 - A

Ref.: K-CMK58-A-1

18.11.2013

010102005801010204

General Data continuation

Type of parametrization	programmable
Prgramming - Tool	TR-Soft: TRWinProg
External inputs - F/R	Count direction
- Preset	electronic adjustment
- Logic level	"0" < +2V, "1" = Supply
Maximum Speed, mechanically	<= 12000 1/min
Shaft load, axial/radial	radial coupling forces
Bearing life time	>= 3.9E+10 revolutions
Bearing life time - Parameter - Speed	6000 1/min
- Operating temperature	60 °C
Angular acceleration	<= 10E+4 rad/s ²
Moment of inertia, typically	1.3E-6 kg m ²
Start-up torque, 20 °C	2 Ncm
Mass, typically	0.3 kg

Environmental conditions

Vibration - Specific value	<= 100 m/s ²
- Sine	50...2000 Hz
Shock - Specific value	<= 1000 m/s ²
- Half sine	11 ms
Immunity to disturbance	DIN EN 61000-6-2
Transient emissions	DIN EN 61000-6-3
Working temperature - Standard	0...+60 °C
- Optional	-20...+70 °C;
Storage temperature, dry	-30...+85 °C
Relative humidity	98 %, non condensing
Protection class - Standard	IP65

Subject to change.


Absolute-Encoder CMK58 - A

Ref.: K-CMK58-A-1

18.11.2013

010102005801010204

Dimensional drawing

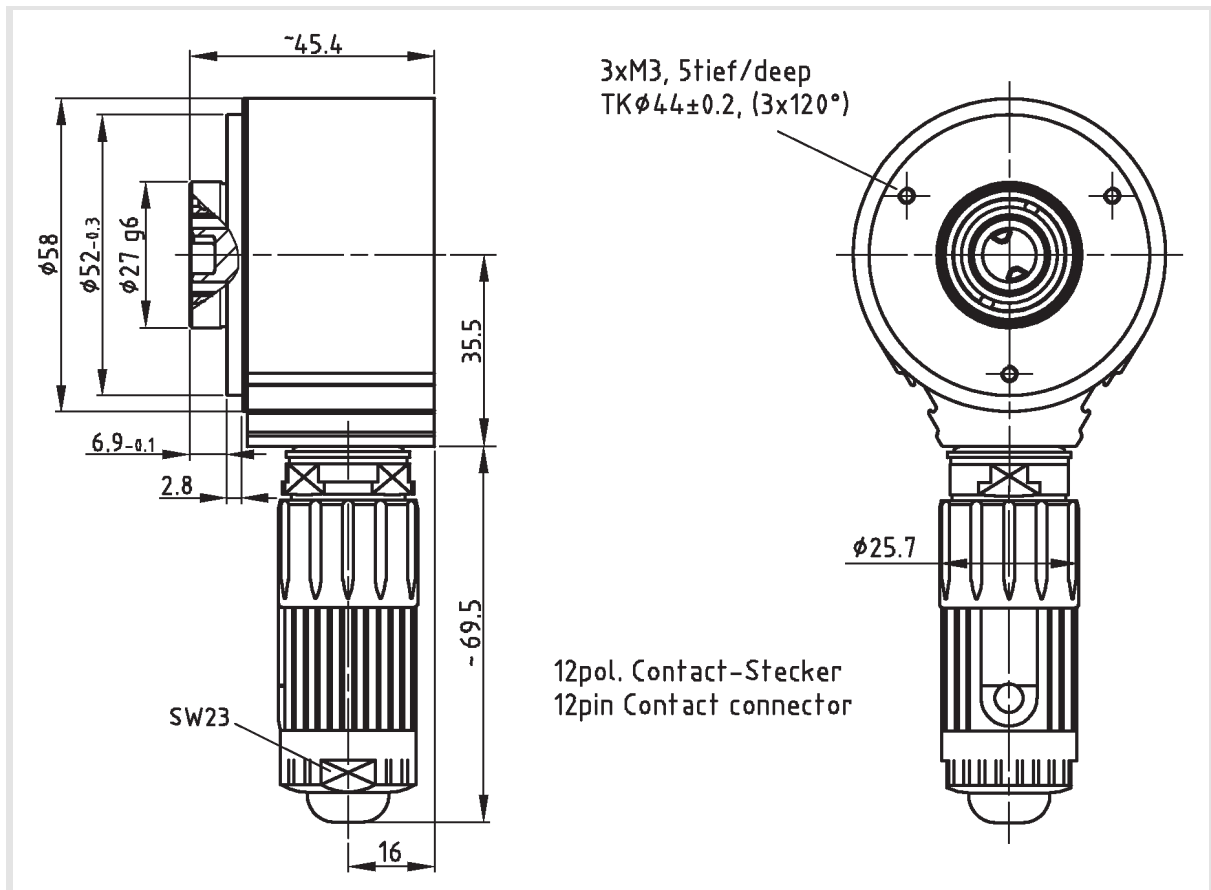

Subject to change.