

Linear-Transducer LP46 - ES3

Ref.: K-LP46-ES3-1

14.11.2013

0102010130

Advantages

- Further interfaces available
- Measures linear movements
- Position value - Adjustment
- Profile housing
- Simple integration
- Wear-free detection



General Data

Supply	
- Supply voltage	24 VDC, -20...+10 %
Current consumption no load	<= 300 mA
Measuring principle	magnetostrictive
Measuring length, standard	50...2000 mm, in steps
Resolution	0.001 mm
Linearity deviation	± 0.10 mm <= 1500 mm
	± 0.15 mm > 1500 mm
Reproducibility	0.005 mm
Hysteresis	0.02 mm <= 1500 mm
	0.1 mm > 1500 mm
Temperature coefficient	< 8 µm/°C <= 500 mm
	< 15 ppm/°C > 500 mm
Straight line velocity	no restrictions
Mounting position	no restrictions
Material - Measuring body	Aluminium extruded profile
Magnet	Slider
	other on request
SERCOS III - Interface	
- SERCOS III	IEC 61784-2, IEC 61158
- Physical Layer	Fast Ethernet, ISO/IEC 8802-3

Subject to change.

TR-Electronic GmbH
 Eglishalde 6
 78647 Trossingen
 Tel. +49 (0) 7425 228-0
 info@tr-electronic.de
www.tr-electronic.de

Linear-Transducer LP46 - ES3

Ref.: K-LP46-ES3-1

14.11.2013

0102010130

General Data continuation

- Device profile	Encoder Profile
Transmission rate	
- Specific value	100 MBit/s
Cycle time	$\geq 130 \mu\text{s}$
Parameter/Function, changeable	Zero adjustment
	Counting direction
Type of parametrization	programmable
Programming - Tool	Fieldbus-Device
	TR-Soft: TRWinProg
Cycle time internal, $\leq 0.50 \text{ m}$	0.50 ms
Cycle time internal, $\leq 1.00 \text{ m}$	1.00 ms
Cycle time internal, $\leq 2.00 \text{ m}$	1.50 ms

Environmental conditions

Vibration	
- Specific value	$\leq 100 \text{ m/s}^2$
- Sine	50...2000 Hz
Shock	
- Specific value	$\leq 1000 \text{ m/s}^2$
- Half sine	11 ms
Immunity to disturbance	DIN EN 61000-6-2
Transient emissions	DIN EN 61000-6-3
Working temperature	
- Standard	0...+70 °C
- Optional	-20...+70 °C;
Storage temperature, dry	-30...+85 °C
Relative humidity	98 %, non condensing
Protection class	
- Standard	IP65
Stray magnetic field	$< 3 \text{ mT}$
Measuring reference	Measuring plane

Subject to change.


Linear-Transducer LP46 - ES3

Ref.: K-LP46-ES3-1

14.11.2013

0102010130

Dimensional drawing

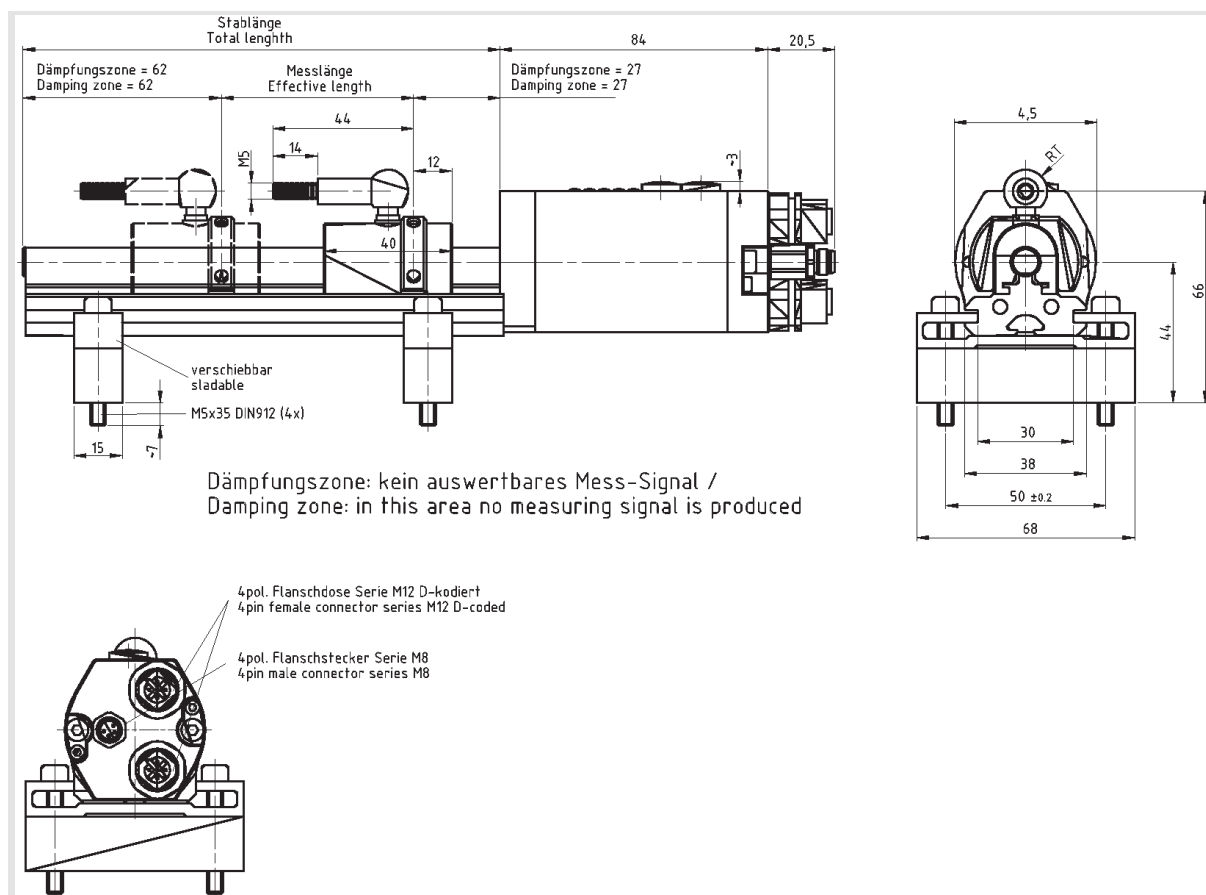

Subject to change.