


Distributor-Box IV-20



- **Module with Incremental-Encoder-connection (K0, /K0, K1, /K1, K2, /K2)**
- **Four operating modes for adaptation to the signal source**
- **Six output channels with adjustable output levels (5VDC, 11-30VDC)**

Electrical Data


Operating Voltage	11-30 V DC
Reverse Battery Protection	yes
Transient Voltage Protection.....	ESD
Excess Current Release	VDE 0113
Filter Groups	IEC 1000-4-x
Power Dissipation (No Load)	< 4 Watt
Min./Max. Input Current per Trace	1,5mA / 20mA (diode current Optocoupler)
Encoder-Module.....	Incremental-serial, electrically isolated from the outputs
Incremental Signal	K0, /K0, K1, /K1, K2, /K2
Max. Pulse Frequency	150 kHz
Pull-Up/Pull-Down - Resistance	1kΩ
Operating modes (signal source adaptation)	adjustable via a jumper coding
Basic Configuration	Differential +5 VDC
Basic Configuration	Differential +(11-30) VDC
Single-Phase.....	Push-Pull +(11-30) VDC
Single-Phase.....	Open-Collector +(11-30) VDC
Single-Phase.....	Open-Emitter +(11-30) VDC
Number of Output Channels	6
Output Level.....	adjustable via a jumper coding
Differential	5 VDC, 30 mA
Differential	+(11-30) VDC, 30 mA
Optional	
Aux. Voltage Output.....	+5 VDC for galvanically uncoupled +5 VDC encoder, max. 200 mA

10

Environmental Data

Electromagnetic compatibility (EMC)	EN 61000-4-2 (IEC-801-2) / EN 61000-4-4 (IEC-801-4)
Operating temperature	0 bis +60°C
Storage temperature range	-20 bis +50°C
Protection	IP 30 (DIN 40 050)

Block diagram IV-20

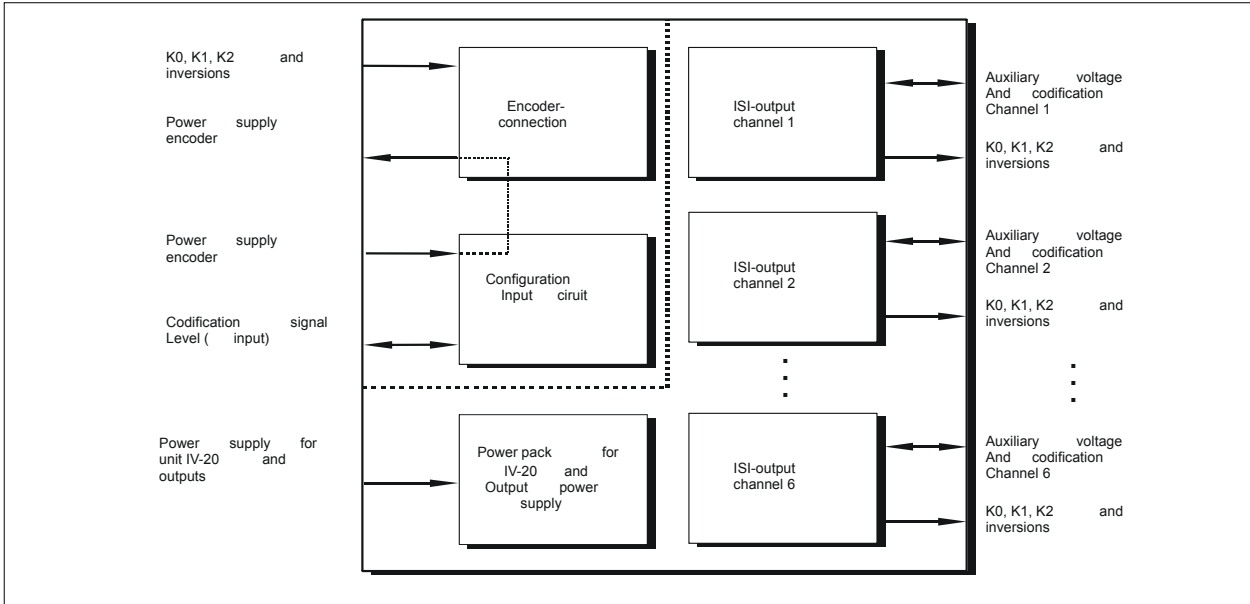

Dimensional Drawing

