

The NEW standard for M18 Photoelectrics.

F 18-2 – series of optical sensors



Optical sensors










- Economical solution for numerous applications
- Scanning distance up to 800 mm, adjustable via potentiometer
- Red light or infrared
- Straight and right angled versions
- Robust metal housing (IP 67)
- Simple adjustment via potentiometer
- 2 through holes for additional mounting possibilities


Optical data		Functions		
Scanning distance, red light	(See selection table)	LED indicator; green	Operating voltage indicator	
Type of light	(See selection table)	LED indicator, yellow	Switching output indicator	
		Sensitivity adjustment	Via potentiometer	
		Adjustment possibilities	N.O./ N.C. via control input (IN)	
		Default setting	Max. scanning distance and N.O.	
Electrical data		Mechanical data		
Operating voltage, +U _B	10 30 V DC	Dimensions	M18 × 44 mm	
No-load current, 10	≤ 30 mA	Enclosure rating	IP 67 ¹	
Output current, le	≤ 100 mA	Material, housing	Metal	
Protective circuits	Reverse-polarity protection U _B /	Material, front screen	PMMA	
	short-circuit protection	Type of connection	(See selection table)	
	PNP / NPN (See selection table)	Operating ambient temperature	-25 +55 °C	
Switching output, Q				
Switching output, Q Output function	$-U_{\rm B} = N.O./ + U_{\rm B} = N.C.$	Weight (plug device)	23 g ² / 25 g ³	
	$-U_{B} = N.O./ + U_{B} = N.C.$ ≤ 1000 Hz	Weight (plug device) Weight (cable device)	$\frac{23 \text{ g}^2 / 25 \text{ g}^3}{63 \text{ g}^2 / 65 \text{ g}^3}$	


¹With IP 67 plug connected ² Straight light exit variant ³ Angled light exit variant

Scanning distance	Type of light	Light exit	Switching output	Type of connection	Part number	Article number
0 400 mm	Red light	Straight	PNP	Metal plug, M12, 4-pin	FT 18-2 RM-PS-L4	740-21021
0 400 mm	Red light	Straight	NPN	Metal plug, M12, 4-pin	FT 18-2 RM-NS-L4	740-21022
0 400 mm	Red light	Straight	PNP	Cable, 2 m, 4-wire	FT 18-2 RM-PS-K4	740-21023
0 400 mm	Red light	Straight	NPN	Cable, 2 m, 4-wire	FT 18-2 RM-NS-K4	740-21024
0 320 mm	Red light	Angled 90°	PNP	Metal plug, M12, 4-pin	FT 18-2 RWM-PS-L4	740-21025
0 320 mm	Red light	Angled 90°	NPN	Metal plug, M12, 4-pin	FT 18-2 RWM-NS-L4	740-21026
0 320 mm	Red light	Angled 90°	PNP	Cable, 2 m, 4-wire	FT 18-2 RWM-PS-K4	740-21027
0 320 mm	Red light	Angled 90°	NPN	Cable, 2 m, 4-wire	FT 18-2 RWM-NS-K4	740-21028
0 800 mm	Infrared	Straight	PNP	Metal plug, M12, 4-pin	FT 18-2 IDM-PS-L4	740-21029
0 800 mm	Infrared	Straight	NPN	Metal plug, M12, 4-pin	FT 18-2 IDM-NS-L4	740-21030
0 800 mm	Infrared	Straight	PNP	Cable, 2 m, 4-wire	FT 18-2 IDM-PS-K4	740-21031
0 800 mm	Infrared	Straight	NPN	Cable, 2 m, 4-wire	FT 18-2 IDM-NS-K4	740-21032



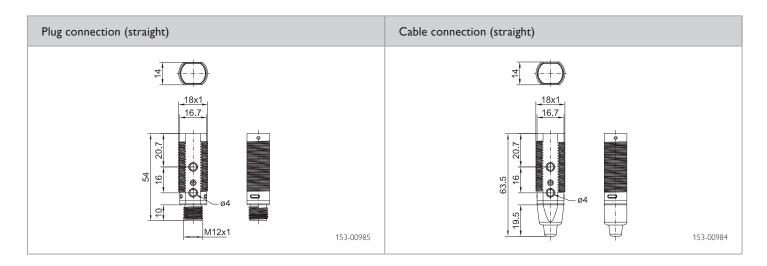

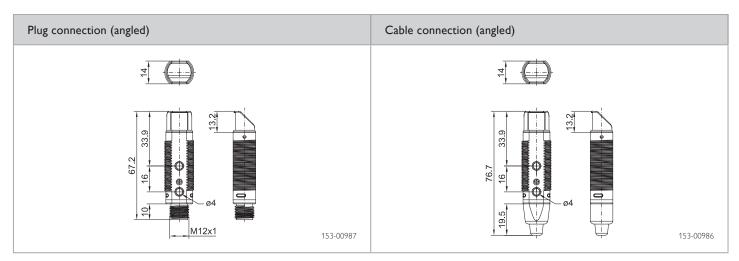

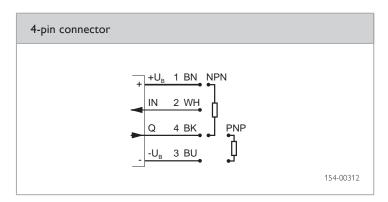










- Economical solution for numerous applications
- Scanning distance up to 800 mm, adjustable via potentiometer
- · Red light or infrared
- Straight and right angled versions
- Robust plastic housing (IP 67)
- Simple adjustment via potentiometer
- 2 through holes for additional mounting possibilities


Optical data		Functions	
Scanning distance Type of light	(See selection table) (See selection table)	LED indicator, green LED indicator, yellow Sensitivity adjustment Adjustment possibilities Default setting	Operating voltage indicator Switching output indicator Via potentiometer N.O./ N.C. via control input (IN) Max. scanning distance and N.O.
Electrical data		Mechanical data	
Operating voltage, +U _B	10 30 V DC	Dimensions	M18 x 44 mm
No-load current, IO	≤ 30 mA	Enclosure rating	IP 67 ¹
Output current, le	≤ 100 mA	Material, housing	ABS
Protective circuits	Reverse-polarity protection U _B /	Material, front screen	PMMA
	short-circuit protection	Type of connection	(See selection table)
Switching output, Q	PNP / NPN (See selection table)	Operating ambient temperature	-25 +55 °C
Output function	$N.O. / N.C. / -U_B = N.O. / +U_B = N.C.$	Weight (plug device)	11 g ² / 13 g ³
6 11 11 6 6 6 6 11 4 4 1	≤ 1000 Hz	Weight (cable device)	55 g ² / 57g ³
Switching frequency, f (ti/tp 1:1)			


¹With IP 67 plug connected ² Straight light exit variant ³ Angled light exit variant

Scanning distance	Type of light	Light exit	Switching output	Type of connection	Part number	Article number
0 400 mm	Red light	Straight	PNP	Plug, M12, 4-pin	FT 18-2 R-PS-L4	740-21033
0 400 mm	Red light	Straight	NPN	Plug, M12, 4-pin	FT 18-2 R-NS-L4	740-21034
0 400 mm	Red light	Straight	PNP	Cable, 2 m, 4-wire	FT 18-2 R-PS-K4	740-21020
0 400 mm	Red light	Straight	NPN	Cable, 2 m, 4-wire	FT 18-2 R-NS-K4	740-21035
0 320 mm	Red light	Angled 90°	PNP	Plug, M12, 4-pin	FT 18-2 RW-PS-L4	740-21036
0 320 mm	Red light	Angled 90°	NPN	Plug, M12, 4-pin	FT 18-2 RW-NS-L4	740-21037
0 320 mm	Red light	Angled 90°	PNP	Cable, 2 m, 4-wire	FT 18-2 RW-PS-K4	740-21038
0 320 mm	Red light	Angled 90°	NPN	Cable, 2 m, 4-wire	FT 18-2 RW-NS-K4	740-21039
0 800 mm	Infrared	Straight	PNP	Plug, M12, 4-pin	FT 18-2 ID-PS-L4	740-21040
0 800 mm	Infrared	Straight	NPN	Plug, M12, 4-pin	FT 18-2 ID-NS-L4	740-21041
0 800 mm	Infrared	Straight	PNP	Cable, 2 m, 4-wire	FT 18-2 ID-PS-K4	740-21042
0 800 mm	Infrared	Straight	NPN	Cable, 2 m, 4-wire	FT 18-2 ID-NS-K4	740-21043



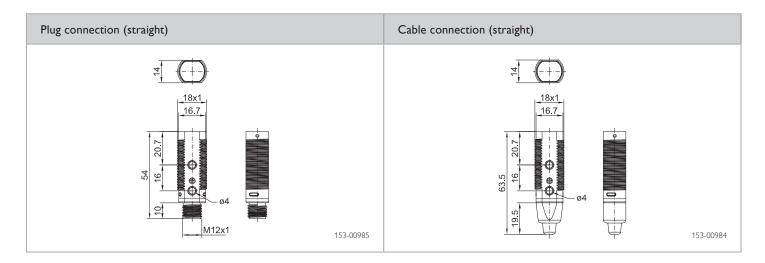

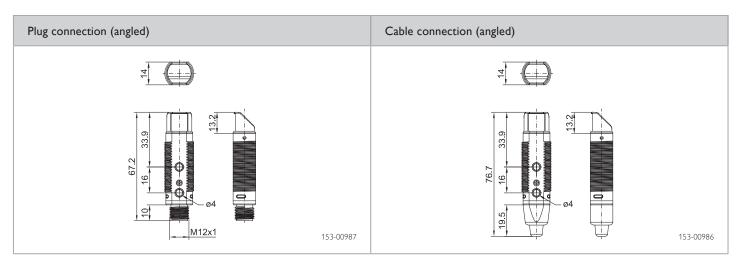

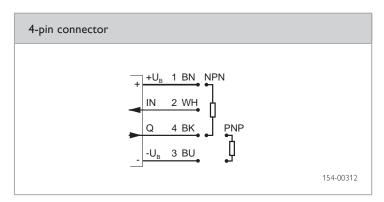

Photoelectric reflex sensor







- Economical solution for numerous applications
- Scanning distance up to 3.0 m
- Straight and right angled versions
- Robust metal housing (IP 67)
- Polarisation filter for reliable detection of highly reflective surfaces
- Simple adjustment via potentiometer
- 2 through holes for additional mounting possibilities

Optical data		Functions		
Operating range	(See selection table) ¹	LED indicator, green	Operating voltage indicator	
Type of light	(See selection table)	LED indicator, yellow	Switching output indicator	
Polarising filter	Yes	Sensitivity adjustment	Via potentiometer	
		Adjustment possibilities	N.O. / N.C. via control input (IN)	
		Default setting	Max. scanning distance and N.O.	
Electrical data		Mechanical data		
Operating voltage, +U _B	10 30 V DC	Dimensions	M18 × 44 mm	
No-load current, I0	≤ 30 mA	Enclosure rating	IP 67 ²	
Output current, le	≤ 100 mA	Material, housing	Metal	
Protective circuits	Reverse-polarity protection U _B /	Material, front screen	PMMA	
	short-circuit protection	Type of connection	(See selection table)	
Switching output, Q	PNP / NPN (See selection table)	Operating ambient temperature	-25 +55 °C	
Output function	N.O. / N.C.	Weight (plug device)	34 g ³ / 36 g ⁴	
Switching frequency, f (ti/tp 1:1)	≤ 1000 Hz	Weight (cable device)	74 g ³ / 76 g ⁴	
	≤ 1 ms			


¹ Reference material: R5 reflector
² With IP 67 plug connected
³ Straight light exit variant
⁴ Angled light exit variant


3.0 m Red li 3.0 m Red li				al plug, M12, 4-pin	FR 18-2 RM-PS-L4	741-11014
3.0 m Red li	<u> </u>			1 0 1		/41-11014
	ght Straight	: NPN	Met			
2.0			1 100	al plug, M12, 4-pin	FR 18-2 RM-NS-L4	741-11015
3.0 m Red li	ght Straight	PNP	Cab	ole, 2 m, 4-wire	FR 18-2 RM-PS-K4	741-11016
3.0 m Red li	ght Straight	: NPN	Cab	ole, 2 m, 4-wire	FR 18-2 RM-NS-K4	741-11017
2.4 m Red li	ght Angled	90° PNP	Met	al plug, M12, 4-pin	FR 18-2 RWM-PS-L4	741-11018
2.4 m Red li	ght Angled	90° NPN	Met	al plug, M12, 4-pin	FR 18-2 RWM-NS-L4	741-11019
2.4 m Red li	ght Angled	90° PNP	Cab	ole, 2 m, 4-wire	FR 18-2 RWM-PS-K4	741-11020
2.4 m Red li	ght Angled	90° NPN	Cab	ole, 2 m, 4-wire	FR 18-2 RWM-NS-K4	741-11021


Scope of delivery
Reflector, 53.4 × 53.4 mm ²
2 × securing nuts





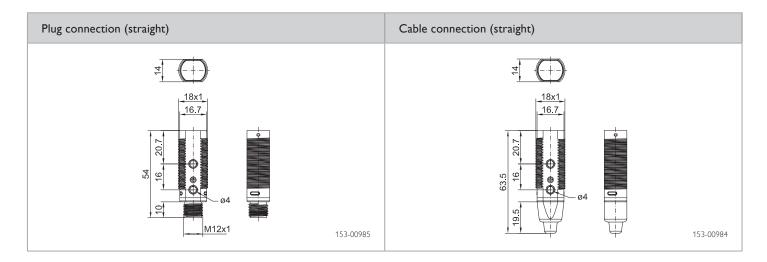

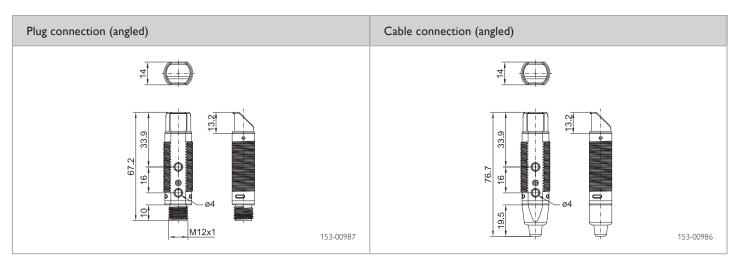

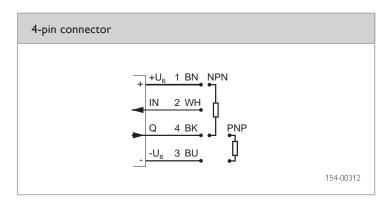

Infrared photoelectric reflex sensor







- Economical solution for numerous applications
- Scanning distance up to 3.60 m
- Straight and right angled versions
- Robust plastic housing (IP 67)
- Simple adjustment via potentiometer
- 2 through holes for additional mounting possibilities

Optical data		Functions		
Operating range Type of light Polarising filter	(See selection table) (See selection table) No	LED indicator, yellow Sensitivity adjustment Adjustment possibilities Default setting	Switching output indicator Via potentiometer N.O./ N.C. via control input (IN) Max. scanning distance and N.O.	
Electrical data		Mechanical data		
Operating voltage, +U _R	10 30 V DC	Dimensions	M18 × 44 mm	
No-load current, IO	≤ 30 mA	Enclosure rating	IP 67 ²	
Output current, le	≤ 100 mA	Material, housing	ABS	
Protective circuits	Reverse-polarity protection U _B /	Material, front screen	PMMA	
	short-circuit protection	Type of connection	(See selection table)	
Switching output, Q	PNP / NPN (See selection table)	Operating ambient temperature	-25 +55 °C	
Output function	N.O. / N.C.	Weight (plug device)	11 g ³ / 13 g ⁴	
Switching frequency, f (ti/tp 1:1)	≤ 1000 Hz	Weight (cable device)	55 g ³ / 57 g ⁴	
Response time	≤ 1 ms			


¹ Reference material: R5 reflector
² With IP 67 plug connected
³ Straight light exit variant
⁴ Angled light exit variant


Operating range	Type of light	Light exit	Switching output	Type of connection	Part number	Article number
3.6 m	Infrared	Straight	PNP	Plug, M12, 4-pin	FR 18-2 I-PS-L4	741-11022
3.6 m	Infrared	Straight	NPN	Plug, M12, 4-pin	FR 18-2 I-NS-L4	741-11023
3.6 m	Infrared	Straight	PNP	Cable, 2 m, 4-wire	FR 18-2 I-PS-K4	741-11024
3.6 m	Infrared	Straight	NPN	Cable, 2 m, 4-wire	FR 18-2 I-NS-K4	741-11025
2.5 m	Infrared	Angled 90°	PNP	Plug, M12, 4-pin	FR 18-2 IW-PS-L4	741-11026
2.5 m	Infrared	Angled 90°	NPN	Plug, M12, 4-pin	FR 18-2 IW-NS-L4	741-11027
2.5 m	Infrared	Angled 90°	PNP	Cable, 2 m, 4-wire	FR 18-2 IW-PS-K4	741-11028
2.5 m	Infrared	Angled 90°	NPN	Cable, 2 m, 4-wire	FR 18-2 IW-NS-K4	741-11029
					1	


Scope of delivery	
Reflector, 53.4 × 53.4 mm ²	
2 × securing nuts	





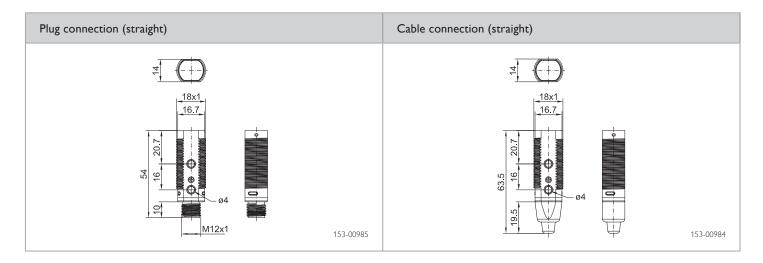

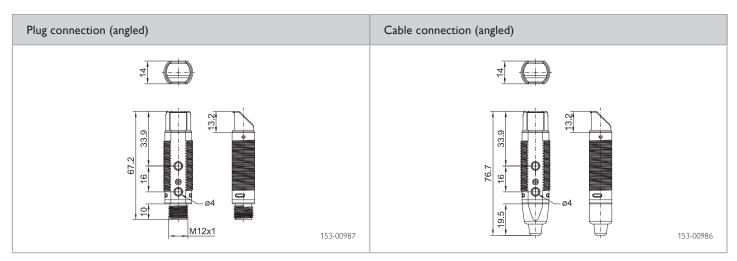

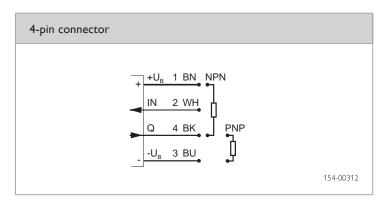

Through-beam photoelectric sensor







- Economical solution for numerous applications
- Long scanning distance up to 10 m
- Robust metal housing (IP 67)
- Simple adjustment via potentiometer
- 2 through holes for additional mounting possibilities

Optical data		Functions	
Operating range Type of light	10 m (See selection table)	LED indicator, green LED indicator, yellow Sensitivity adjustment Adjustment possibilities Default setting	Operating voltage indicator Switching output indicator Via potentiometer N.O./ N.C. via control input (IN) Max. scanning distance and N.O.
Electrical data		Mechanical data	
Operating voltage, +U _B	10 30V DC	Dimensions	M18 x 44 mm
No-load current, IO	≤ 30 mA	Enclosure rating	IP 67 ¹
Output current, le	≤ 100 mA	Material, housing	Metal
Protective circuits	Reverse-polarity protection U _B /	Material, front screen	PMMA
	short-circuit protection	Type of connection	(See selection table)
Switching output, Q	PNP / NPN (See selection table)	Operating ambient temperature	-25 +55 °C
Output function	N.O. / N.C.	Weight (plug device)	46 g
	≤ 400 Hz	Weight (cable device)	130 g
Switching frequency, f (ti/tp 1:1)	≥ 100 F IZ	VVEIGHT (Cable device)	1 1 J U g


¹ With IP 67 plug connected


Transmitter / receiver	Type of light	Light exit	Switching output	Type of connection	Part number	Article number
Transmitter / receiver Transmitter / receiver	Infrared Infrared	Straight Straight	PNP NPN	Metal plug, M12, 4-pin Metal plug, M12, 4-pin	FSE 18-2 IM-PS-L4 FSE 18-2 IM-NS-L4	742-51004 742-51005
Transmitter / receiver	Infrared	Straight	PNP	Cable, 2 m, 4-wire	FSE 18-2 IM-PS-K4	742-51006
Transmitter / receiver	Infrared	Straight	NPN	Cable, 2 m, 4-wire	FSE 18-2 IM-NS-K4	742-51007

Scope of delivery	
Transmitter & receiver	



Through-beam photoelectric sensor

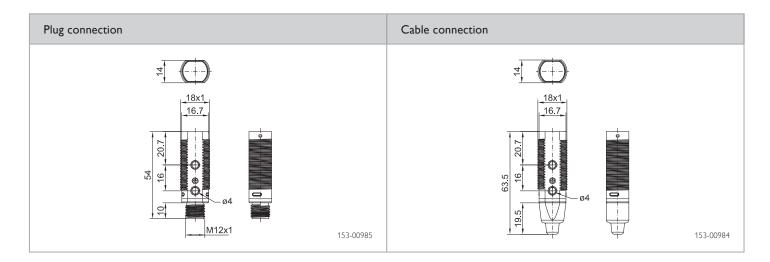

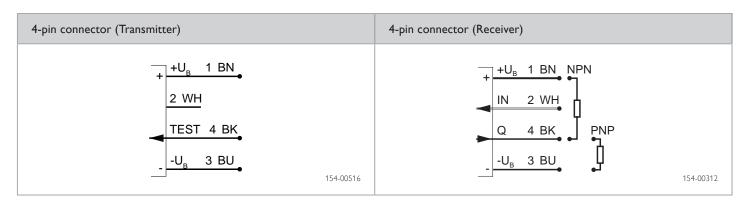

We look ahead.

Yesterday, today and in the future.











VISION

Since SensoPart was founded in 1994, we have constantly focussed on the future. Our motto has always been: We gauge ourselves not by what is possible today, but by our ideas for what can be achieved in the future. Many ground-breaking ideas from that time have since become successful products, which are now indispensible in modern automation technology — endorsed by the numerous prizes for innovation which we have received over recent years. Today, SensoPart is the technological leader in many areas of industrial sensor technology. And we still have many ideas for the future.

SENSOR TECHNOLOGY

Light barriers Vision sensors Proximity switches Smart cameras Object detection Laser sensors Miniature sensors Object measurement Distance sensors Colour detection Colour sensors Code reading Lighting Contrast sensors Anti-collision sensors Lenses Slot sensors Fibre-optic amplifiers Inductive sensors

Find the suitable product for your application under www.sensopart.com

Germany

SensoPart Industriesensorik GmbH Nägelseestraße 16 D-79288 Gottenheim Tel. +49 7665 94769-0 Fax +49 7665 94769-765 www.sensopart.com

France

SensoPart France SARL
11, rue Albert Einstein
Espace Mercure
F-77420 Champs – Marne la Vallée
Tél. +33 164 73 00 61
Fax +33 164 7310 87
www.sensopart.com

Great Britain

SensoPart UK Limited Unit 12 – 14, Studio 1 Waterside Court, Third Avenue, Centrum 100, Burton on Trent DE14 2WQ Tel. +44 1283 567470 Fax +44 1283 740549

www.sensopart.com

Capacitive sensors

Ultrasonic sensors

USA

SensoPart Inc. 28400 Cedar Park Blvd Perrysburg OH 43551, USA Tel. +1 866 282-7610 Fax +1 419 931-7697

www.sensopart.com