



CCTV lenses




- A wide range of products from f=6mm to 100mm.
- Focus and iris are adjustable using attached locking screws.
- Camera mount: C mount

CCTV (Closed Circuit Television) lenses were developed to recognize images in a wide area. All models have an iris and focus adjustment that you can set as required with the included locking screws (*1). Using optional close-up ring and converter lenses allows for macro photography. (*2).

*1 Not designed to be vibration proof.

*2 Tolerances of lenses may increase and image quality may worsen as a result.

ML-10035

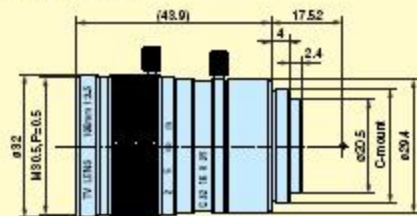

Model	Focal distance	Focus (Fno.)	Field of view (VxH)	Closest distance	Filter screw	Weight (g)	Largest compatible C.C.D	Mount
ML-10035	100mm	F3.5~Close	3.8' x 5.1"	1m	M30.5 P0.5	65g	2/3"	C-mount

Field, WD, and magnification when a close-up ring is used

Close-up ring (mm)	ML-10035			
	Field of view (length x width)	Field of view (length x width)	WD (mm)	Magnification
	1/2"	1/3"		
0	46 x 62	35 x 46	1000	x0.10
1.5				
2				
5	27 x 37	21 x 27	724	x0.18
	95 x 127	71 x 95	2413	x0.05
10	19 x 26	15 x 19	609	x0.25
	48 x 63	36 x 48	1432	x0.10
15	15 x 20	11 x 15	546	x0.32
	32 x 42	24 x 32	1105	x0.15
20	12 x 16	9 x 12	505	x0.39
	24 x 32	18 x 24	941	x0.20
25	10 x 14	8 x 10	478	x0.46
	19 x 25	14 x 19	843	x0.25
30	9.0 x 12	6.7 x 9.0	458	x0.54
	16 x 21	12 x 16	778	x0.30
35	7.9 x 11	5.9 x 7.9	443	x0.61
	14 x 18	10 x 14	731	x0.35
40	7.1 x 9.4	5.3 x 7.1	430	x0.68
	12 x 16	8.9 x 12	696	x0.40
45	6.4 x 8.5	4.8 x 6.4	421	x0.75
	11 x 14	7.9 x 11	669	x0.45
50	5.8 x 7.8	4.4 x 5.8	412	x0.82
	9.5 x 13	7.1 x 9.5	647	x0.50
60	5.0 x 6.6	3.7 x 5.0	400	x0.97
	7.9 x 11	5.9 x 7.9	614	x0.61