



Basler

Technical Specification

PoCL Cable Camera Link SDR/MDR Full 10m

for ace CMOSIS CL, racer CL

Order Number 2000031084

Version: 01 Language: 000 (English)

Release Date: May 24th 2012




Basler AG

An der Strusbek 60-62

22926 Ahrensburg, Germany

Drawing

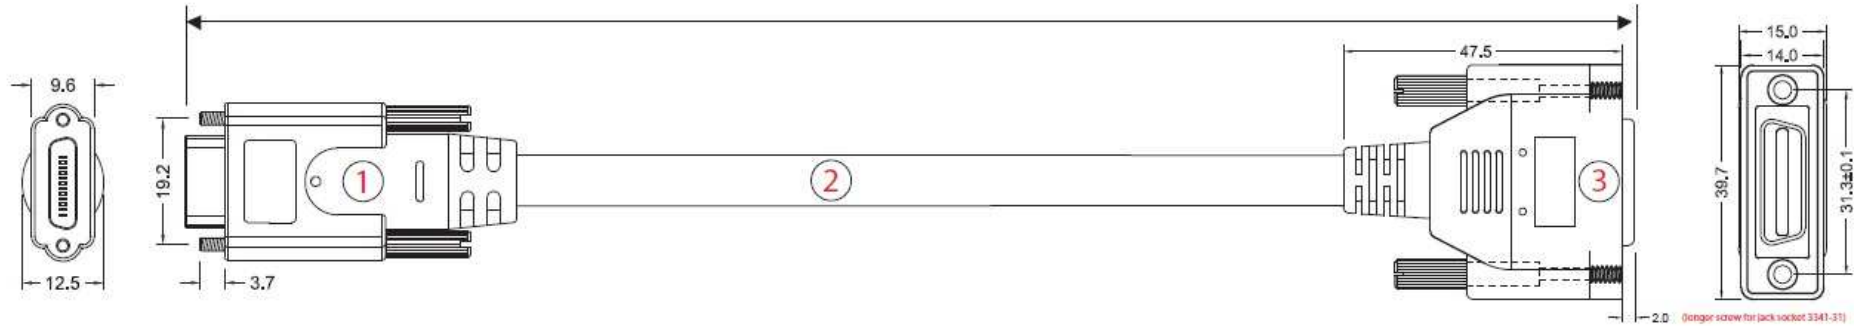

Item	Description
1	26P Male HDR (SDR) Moulded Connector. <IVORY> (connector HDR-E26MSG1+)
2	MCD-408 UL20276 11STP#30 100Ohm, 2C+2Cui#28 [8.4] IVORY <Full Duplex, PoCL>
3	26P Male MDR Moulded Connector <IVORY>

Specification

1	1	Black	Power L +12V
14	14	1	Inner Shield
2	25	white	Tx Data 0-
15	12	red	Tx Data 0+
3	24	white	Tx Data 1-
16	11	blue	Tx Data 1+
4	23	white	Tx Data 2-
17	10	green	Tx Data 2+
5	22	white	XCLK-
18	9	yellow	XCLK+
6	21	white	Tx Data 3-
19	8	violet	Tx Data 3+
7	20	red	SerTC+
20	7	black	SerTC-
8	19	black	SerTFG-
21	6	blue	SerTFG+
9	18	black	CC1-
22	5	green	CC1+
10	17	yellow	CC2+
23	4	black	CC2-
11	16	black	CC3-
24	3	violet	CC3+
12	15	white	CC4+
25	2	black	CC4-
13	13	2	Inner Shield
26	26	White	Power L +12V
		Housing	Outer Shield

Contacting Basler Support Worldwide

Europe:

Basler AG
An der Strusbek 60 - 62
22926 Ahrensburg
Germany

Tel.: +49-4102-463-500
Fax.: +49-4102-463-599

bc.support.europe@baslerweb.com

Americas:

Basler, Inc.
855 Springdale Drive, Suite 160
Exton, PA 19341
U.S.A.

Tel.: +1-877-934-8472
Fax.: +1-610-280-7608

bc.support.usa@baslerweb.com

Asia:

Basler Asia Pte. Ltd.
8 Boon Lay Way
03 - 03 Tradehub 21
Singapore 609964

Tel.: +65-6425-0472
Fax.: +65-6425-0473

bc.support.asia@baslerweb.com

www.baslerweb.com

All material in this publication is subject to change without notice and is copyright Basler Vision Technologies.