


**Model Number**

IT 12-8N-PS-K3

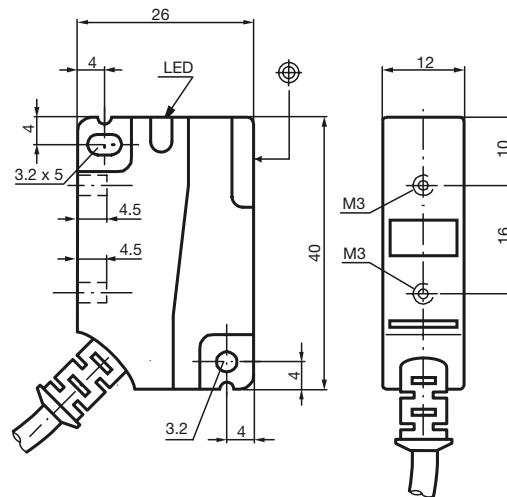
Inductive sensor

Features

- Basic series
- 8 mm not embeddable

Connection**Safety Note**

The use of this device in applications, where the safety of persons depends from the devices function, is not allowed!

Dimensions**Technical Data****General specifications**

Switching element function	PNP Make function
Rated operating distance	s_n 8 mm
Installation	not embeddable
Output polarity	DC
Assured operating distance	s_a 0 ... 6.48 mm
Reduction factor r_{AI}	0.3
Reduction factor r_{Cu}	0.2
Reduction factor r_{V2A}	0.7

Nominal ratings

Operating voltage	U_B	10 ... 30 V
Switching frequency	f	0 ... 1400 Hz
Hysteresis	H	typ. 5%
Reverse polarity protection		protected against reverse polarity
Short-circuit protection		pulsing
Voltage drop	U_d	≤ 2.5 V
Operating current	I_L	0 ... 250 mA
Off-state current	I_r	0 ... 0.01 mA typ. 0.1 μ A at 25 °C
No-load supply current	I_0	≤ 15 mA
Indication of the switching state		LED, yellow

Standard conformity

Standards	IEC / EN 60947-5-2:2004
-----------	-------------------------

Ambient conditions

Ambient temperature	-25 ... 70 °C (248 ... 343 K)
---------------------	-------------------------------

Mechanical specifications

Connection type	2 m, PVC cable
Core cross-section	0.5 mm ²
Housing material	PA
Sensing face	PA
Protection degree	IP67

Approvals and certificates

UL approval	cULus Listed, General Purpose
-------------	-------------------------------